CONTRACT NO: HY/2019/18

WANCHAI DEVELOPMENT PHASE II AND CENTRAL **WANCHAI BYPASS** SAMPLING, FIELD MEASUREMENT AND TESTING WORK (STAGE 4)

ENVIRONMENTAL PERMIT NO. EP-122/2002/E

QUARTERLY ENVIRONMENTAL MONITORING AND AUDIT REPORT

- NOVEMBER 2019 TO JANUARY 2020 -

CLIENTS:

Civil Engineering and Development Department

PREPARED BY:

Lam Geotechnics Limited

11/F Centre Point 181-185 Gloucester Road, Wanchai, H.K.

Telephone: (852) 2882-3939 Facsimile: (852) 2882-3331 E-mail: info@lamenviro.com

Website: http://www.lamenviro.com

CHECKED BY:

Raymond Dai

Environmental Team Leader

277

DATE:

31 March 2020



TABLE OF CONTENTS

EX	ECUT	IVE SUMMARY	3
1.	INTE	RODUCTION	5
	1.1 1.2	Scope of the ReportStructure of the Report	
2.	PRO	JECT BACKGROUND	6
	2.1 2.2 2.3 2.4	Background	6 7
3.	MON	NITORING REQUIREMENTS	9
	3.1. 3.2. 3.3.	Noise Monitoring Air Quality Monitoring Water Quality Monitoring	10
4.	MON	NITORING RESULTS	15
	4.1. 4.2. 4.3. 4.4.	Noise Monitoring Results Air Quality Monitoring Results Water Quality Monitoring Results Waste Monitoring Results	15 17
5.	COM	IPLIANCE AUDIT	19
	5.1. 5.2. 5.3. 5.4. 5.5. 5.6.	Noise Monitoring Air Quality Monitoring Water Quality Monitoring Site Audit Review of the Reasons for and the Implications of Non-compliance Summary of action taken in the event of and follow-up on non-compliance	19 19 19 20
6.	COM	IPLAINTS, NOTIFICATION OF SUMMONS AND PROSECUTION	21
7. PR		IULATIVE CONSTRUCTION IMPACT DUE TO THE CONCURRENT IS	22
8.	CON	CLUSION	23



Ref.: AACWBIECEM00_0_12055L.20

31 March 2020

By Post and Fax (2691 2649)

AECOM Asia Company Limited

11/F, Tower 2
Grand Central Plaza
138 Shatin Rural Committee Road
Shatin, New Territories
Hong Kong

Attention: Mr. Conrad Ng

Dear Mr. Ng,

Re: Wan Chai Development Phase II and Central-Wan Chai Bypass

<u>Quarterly Environmental Monitoring and Audit Report (November 2019 – January 2020) for EP-122/2002/E</u>

Reference is made to the Environmental Team's submission of the captioned Quarterly Environmental Monitoring and Audit (EM&A) Report for November 2019 - January 2020 received by e-mail on 25 February 2020.

Please be informed that we have no adverse comment on the captioned submission. We write to verify the captioned submission.

Please do not hesitate to contact the undersigned should you have any queries.

Yours faithfully,

David Yeung

Independent Environmental Checker

c.c. CEDD Mr. Jimmy Ling by fax: 2301 1277

AECOM Mr. Francis Leong / Mr. Stephen Lai by fax: 2691 2649 Lam Mr. Raymond Dai by fax: 2882 3331



TABLE OF CONTENTS

EX	ECUT	IVE SUMMARY	3
1.	INTE	RODUCTION	5
	1.1 1.2	Scope of the ReportStructure of the Report	
2.	PRO	JECT BACKGROUND	6
	2.1 2.2 2.3 2.4	Background	6 7
3.	MON	NITORING REQUIREMENTS	9
	3.1. 3.2. 3.3.	Noise Monitoring Air Quality Monitoring Water Quality Monitoring	10
4.	MON	NITORING RESULTS	15
	4.1. 4.2. 4.3. 4.4.	Noise Monitoring Results Air Quality Monitoring Results Water Quality Monitoring Results Waste Monitoring Results	15 17
5.	COM	IPLIANCE AUDIT	19
	5.1. 5.2. 5.3. 5.4. 5.5. 5.6.	Noise Monitoring Air Quality Monitoring Water Quality Monitoring Site Audit Review of the Reasons for and the Implications of Non-compliance Summary of action taken in the event of and follow-up on non-compliance	19 19 19 20
6.	COM	IPLAINTS, NOTIFICATION OF SUMMONS AND PROSECUTION	21
7. PR		IULATIVE CONSTRUCTION IMPACT DUE TO THE CONCURRENT IS	22
8.	CON	CLUSION	23



LIST OF TABLES

Table 1.1	Principal Work Activities in the reporting period for Contractor no. HK/2012/08
Table 2.1	Schedule 2 Designated Projects under this Project
Table 2.2	Contact Details of Key Personnel
Table 2.3	Principal Work Activities in the reporting period for Contracor no. HK/2012/08
Table 3.1	Continuous Noise Monitoring Stations
Table 3.2	Air Monitoring Stations
Table 3.3	Water Quality Monitoring Stations
Table 3.4	Marine Water Quality Monitoring Frequency and Parameters
Table 4.1	Continuous Noise Monitoring Stations for Contract no. HK/2012/08
Table 4.3	Air Monitoring Station for Contract no. HK/2012/08
Table 4.5	Water Quality Monitoring Station for Contract no. HK/2012/08
Table 4.6	Details of Waste Disposal for Contract no. HK/2012/08
Table 6.1	Cumulative Statistics on Complaints
Table 6.2	Cumulative Statistics on Successful Prosecutions

LIST OF FIGURES

Figure 2.1	Project Layout
Figure 2.2	Project Organization Chart
Figure 3.1	Locations of Environmental Monitoring Stations

LIST OF APPENDICES

Appendix 3.1 Action and Limit Level Appendix 5.1 Event Action Plans Appendix 6.1 Complaint Log	Appendix 2.1	Environmental Mitigation Implementation Schedule
Appendix 6.1 Complaint Log	Appendix 3.1	Action and Limit Level
	Appendix 5.1	Event Action Plans
	Appendix 6.1	Complaint Log
Appendix 8.1 Construction Programme of Individual Contracts	Appendix 8.1	Construction Programme of Individual Contracts

EXECUTIVE SUMMARY

- i. This is the Quarterly Environmental Monitoring and Audit (EM&A) Report November 2019 to January 2020 specific for Environmental Permit no. EP-122/2002/E. The EM&A report is prepared by the Environmental Team (ET) employed under Contract No. HY/2019/18 Wan Chai Development Phase II and Central Wanchai Bypass Sampling, Field Measurement and Testing Works (Stage 4). This report presents the environmental monitoring and audit findings and information during the period from 1st November 2019 to 31th January 2020.
- ii. The implementation of the Environmental Monitoring and Audit Programme for the Wan Chai Development phase II and Central-Wan Chai Bypass Project has been taken over by the Lam Geotechnics Limited (LGL) under Contract HY/2019/18 Wan Chai Development Phase II and Central Wanchai Bypass Sampling, Field Measurement and Testing Works (Stage 4) from 10 December 2019 in continuation of the previous Environmental Team employed under Contact HK/2015/01 Wan Chai Development Phase II and Central Wanchai Bypass Sampling, Field Measurement and Testing Works (Stage 3).

Construction Activities for the Reported Period

iii. During this reporting period, the principle work activities of the contracts are included as follows:

Contract no. HK/2012/08 – Wan Chai Development Phase II – Central- Wan Chai Bypass at Wan Chai West

Table 1.1 Principal Work Activities in the reporting period for Contract no. HK/2012/08

November 2019	December 2019	January 2020	
• Nil	• Nil	• Nil	

Noise Monitoring

- iv. Continuous noise monitoring was conducted at ACL3 City Hall.
- v. Due to safety concerned, the location of the continuous noise monitoring station at City Hall was finely adjusted to the roof of the City Hall, Low Block on 1 May 2013.
- vi. As WDII RSS confirmation of construction works completion at CRIII area on 21 October 2019 and agreed with IEC on 1 November 2019, the continuous noise monitoring at ACL3 – City Hall for Contract no. HK/2012/08 under EP-122/2002/E was suspended from 1 November 2019 onward.



Air Quality Monitoring

- vii. Due to the defective electricity supply found at monitoring station ACL1 and the advice from City Hall Building Management, the air monitoring station ACL1 City Hall was finely adjusted on 28 Feb 2014 to an alternate electricity supply.
- viii. 1-hour and 24-hour Total Suspended Particulates (TSP) monitoring were conducted at ACL1 City Hall and ACL2 PLA Barracks (ACL2a Contractor HK/2012/08 Site Office since 7 December 2013) on every six days basis.
- ix. Due to the large scale renovation works at People's Liberation Army Headquarter, a Proposal for Relocation of Air Quality Monitoring Station at People's Liberation Army Headquarter (ACL2) was formally submitted to EPD on 4th November, 2013.
- x. Air Quality Monitoring at ACL2 was temporarily suspended during the period from 14th November, 2013 to 3rd December, 2013.
- xi. The Proposal for Relocation of Air Quality Monitoring Station at People's Liberation Army Headquarter (ACL2) was approved by EPD on 27 November 2013.
- xii. According to the approved proposal for relocation of Air Quality Monitoring station, the action and limit levels of ACL2a shall adopt the reference monitoring result from the baseline air quality monitoring report for EP/364/2009 in 22 April 2010 in which approved by EPD.
- xiii. The air quality monitoring at ACL2a Contractor HK/2012/08 Site Office was commenced on 7 December 2013.
- xiv. As WDII RSS confirmation of construction works completion at CRIII area on 21 October 2019 and agreed with IEC on 1 November 2019, the air quality monitoring at ACL1 City Hall and ACL2a Contractor HK/2012/08 Site Office for Contract no. HK/2012/08 under EP-122/2002/E was suspended from 1 November 2019 onward.

Water Quality Monitoring

- xv. As confirmed by WDII RSS, the dredging works, seawall modification works and other associated works undertaken at Central Reclamation Phase III by Contractor HK/2012/08 was commenced in late September 2014. According to the approved EM&A manual under EP-122/2002/E, water quality monitoring shall be implemented at the Central Reclamation Phase III works area accordingly to assess any potential water quality impact during the construction period.
- xvi. Water quality monitoring at M5B and Culvert J were conducted three days per weeks during the reporting period starting from 26 September 2014.
- xvii. With respect to the confirmation of completion of marine work by WDII RSS, the water quality monitoring at M5B and Culvert J was temporary suspended from 23 August 2019 onward after completion of 4 weeks post-construction monitoring and with agreement from IEC.

Complaints, Notifications of Summons and Successful Prosecutions

xviii. No environmental complaint was received in this reporting quarter.

1. INTRODUCTION

1.1 Scope of the Report

- 1.1.1. Lam Geotechnics Limited (LGL) has been appointed to work as the Environmental Team (ET) under Environmental Permit no. EP-122/2002/E to implement the Environmental Monitoring and Audit (EM&A) programme as stipulated in the EM&A Manual of the approved Environmental Impact Assessment (EIA) Report Central Reclamation Phase III Studies, Site Investigation, Design and Construction (Register No.: AEIAR-040/2001) since 1 May 2013.
- 1.1.2. This report documents the finding of EM&A works for Environmental Permit (EP) no. EP-122/2002/E, during the period from 1st November 2019 to 31th January 2020.

1.2 Structure of the Report

- **Section 1** *Introduction* details the scope and structure of the report.
- **Section 2 Project Background** summarizes background and scope of the project, site description, project organization and contact details of key personnel during the reporting period.
- **Section 3** *Monitoring Requirements* summarizes all monitoring parameters, monitoring locations, monitoring frequency, duration and action plan.
- **Section 4** *Monitoring Results* summarizes the monitoring results obtained in the reporting period.
- **Section 5 Compliance Audit** summarizes the auditing of monitoring results, all exceedances environmental parameters.
- Section 6 Complaints, Notification of summons and Prosecution summarizes the cumulative statistics on complaints, notification of summons and prosecution
- Section 7 Cumulative Construction Impact due to the Concurrent Projects summarizes the relevant cumulative construction impact due to the concurrent activities of the concurrent Projects.

Section 8 Conclusion



2. PROJECT BACKGROUND

2.1 Background

2.1.1 Central Reclamation Phase III - Studies, Site Investigation, Design and Construction (hereafter called "the Project") are Designated Project (DP) under the Environmental Impact Assessment Ordinance (Cap. 499) (EIAO). The Environmental Impact Assessment (EIA) Reports for Central Reclamation Phase III - Studies, Site Investigation, Design and Construction (Register No. AEIAR-040/2001) has been approved on 31 August 2001.

2.2 Scope of the Project and Site Description

- 2.2.1. The design and construction of Central Reclamation Phase III involves the permanent reclamation and construction and operation of a trunk road and its road tunnel that is shown at *Figure 2.1*.
- 2.2.2. The key purpose of the study area encompasses the area of Victoria Harbour to the southeast of the new Outlying Islands Ferry Piers and north of Edinburgh Place and Lung Wui Road. The area extends eastward to Fenwick Pier Street and the Fleet Arcade, and includes the existing GPO, Star Ferry Piers, Queens Pier, City Hall, PLA Headquarters, Hong Kong Red Cross Headquarters building and the Tamar Site. The scope of the Central Reclamation, Phase III includes:
 - Reclamation and seawalls, roads and associated services, North Island Line
 Protection Works and Advance Trunk Road Tunnel (ATRT) for the CWB;
 - Reprovisioning of Star Ferry Pier, public landing steps, wallah wallah moorings, and motor boat/launch operators' kiosks;
 - External cooling water systems which consist of the cooling water pumping shells for future developments, and the reprovisioning of existing cooling water pumping stations and associated pipework systems and E&M works;
 - Reprovisioning of existing Leisure and Cultural Services Department (LCSD)'s facilities;
 - Provision of a flood relief path, stormwater culvert extensions, upgrading of hinterland stormwater drainage resulting from the reclamation, demolition of the existing waterfront structures and necessary landscaping;
 - The Hong Kong Station Extended Overrun Tunnel (EOT) and associated ventilation structures entrusted for construction within the CRIII works;
 - Reprovisioning of the Government Heliport at the Wan Chai PCWA and reprovisioning of the Wan Chai PCWA at Chai Wan Basin.
- 2.2.3. The project also contains various Schedule 2 DPs that, under the EIAO, require Environmental Permits (EPs) to be granted by the DEP before they may be either constructed

or operated. *Table 2.1* summarises the four individual DPs under this Project. *Figure 2.1* shows the locations of these Schedule 2 DPs.

Table 2.1 Schedule 2 Designated Projects under this Project

Item	Designated Project	EIAO Reference
DP1	Reclamation works	Schedule 2, Part I, A.7
DP2	Road P2 and other roads which are classified as primary/district distributor roads	Schedule 2, Part I, A.1
DP3	Central-Wanchai bypass (CWB)	Schedule 2, Part I, C.1
DP4	The North Island Line (NIL) Protection Works within CRIII	Schedule 2, Part I, A.7

- 2.2.4. Contract HK/2012/08 Wan Chai Development Phase II Central-Wan Chai Bypass at Wan Chai West as part of the Project works by Civil Engineering and Development Department (CEDD) is associated with Designated Project 1 (DP1) and Designated Project 2 (DP2).
- 2.2.5. Contract HY/2010/08 Central Wanchai Bypass Tunnel as part of the Project works by the Highways Department (HyD) is associated with Designated Project 2 (DP2).

2.3 Project Organization and Contact Personnel

- 2.3.1 Civil Engineering and Development Department is the overall project controllers for the Central Reclamation Phase III Project. For the construction phase of the Project, Project Engineer, Contractor(s), Environmental Team and Independent Environmental Checker are appointed to manage and control environmental issues.
- 2.3.2 The proposed project organization and lines of communication with respect to environmental protection works are shown in *Figure 2.2*. Key personnel and contact particulars are summarized in *Table 2.2*:

Table 2.2 Contact Details of Key Personnel

Party	Role	Post	Name	Contact No.	Contact Fax
AECOM	Engineer's Representative for WDII	Chief Resident Engineer	Ms. Gloria Tang	2587 1778	2587 1877
China State- Build King	Contractor under Contract	Project Director	C. N. LAI	9106 5806	2877 1522
JV	no. HK/2012/08	Site Agent	Mr. George Cheung	9268 1918	
		Environmental Officer	Mr. James Ma	9130 9549	
		Environmental Supervisor	Mr. Y. L. HO	9856 5669	
Ramboll	Independent	Independent	Mr. David Yeung	3465 2888	3465 2899
Hong Kong Limited	Environmental Checker (IEC)	Environmental Checker (IEC)			
Lam Geotechnics Limited	Environmental Team (ET)	Environmental Team Leader (ETL)	Mr. Raymond Dai	2882 3939	2882 3331

2.4 Principal Work and Activities

2.4.1 During this reporting period, the principle work activities of the contracts are included as follows:

<u>Contract no. HK/2012/08 – Wan Chai Development Phase II – Central- Wan Chai Bypass at</u> <u>Wan Chai West</u>

Table 2.3 Principal Work Activities in the reporting period for HK/2012/08

November 2019	December 2019	January 2020	
• Nil	• Nil	• Nil	

2.4.2 Implementation status of the recommended mitigation measures during this reporting period is presented in *Appendix 2.1*.

3. MONITORING REQUIREMENTS

3.1. Noise Monitoring

NOISE MONITORING STATIONS

3.1.1. The continuous noise monitoring station for the Project is listed and shown in *Table 3.1* and *Figure 3.1*. *Appendix 3.1* shows the established Action/Limit Levels for the monitoring works.

Table 3.1 Continuous Noise Monitoring Stations

District Station		Description
Central	ACL3	City Hall

NOISE MONITORING PARAMETERS, FREQUENCY AND DURATION

- 3.1.2. Continuous 24-hour noise monitoring shall be carried out at the designated monitoring stations. The following is an initial guide on the regular monitoring frequency for each station on a 24 hours daily basis when noise generating activities are underway:
 - One set of measurements between 0700 and 1900 hours on normal weekdays.
 - One set of measurements between 1900 and 2300 hours on normal weekdays and 0700 and 2300 hours on public holidays.
 - One set of measurements between 2300 and 0700 hours on next day on everyday.
- 3.1.3. If construction works are extended to include works during the hours of 1900 0700 as well as public holidays and Sundays, additional weekly impact monitoring shall be carried out during respective restricted hours periods. Applicable permits under NCO shall be obtained by the Contractor.

MONITORING EQUIPMENT

- 3.1.4. As referred to in the Technical Memorandum ™ issued under the NCO, sound level meters in compliance with the International Electrotechnical Commission Publications 651: 1979 (Type 1) and 804: 1985 (Type 1) specifications shall be used for carrying out the noise monitoring. Immediately prior to and following each noise measurement the accuracy of the sound level meter shall be checked using an acoustic calibrator generating a known sound pressure level at a known frequency. Measurements may be accepted as valid only if the calibration level from before and after the noise measurement agrees to within 1.0 dB.
- 3.1.5. Noise measurements shall not be made in fog, rain, wind with a steady speed exceeding 5 m/s or wind with gusts exceeding 10 m/s. The wind speed shall be checked with a portable wind speed meter capable of measuring the wind speed in m/s.



3.1.6. The sound level meter shall be checked using an acoustic calibrator generating a known sound pressure level at a known frequency before deployment to the site and during each site visit. Measurements will be accepted as valid only if the calibration level from before and after the noise measurement agrees to within 1.0 dB.

3.2. Air Quality Monitoring

AIR QUALITY MONITORING STATIONS

3.2.1. The air quality monitoring stations for the Project are listed and shown in *Table 3.2* and *Figure 3.1*. *Appendix 3.1* shows the established Action/Limit Levels for the monitoring works.

Table 3.2 Air Quality Monitoring Stations


Station ID	Monitoring Location
ACL1	City Hall
ACL2a	Contractor HK/2012/08 Site Office

AIR QUALITY MONITORING PARAMETERS, FREQUENCY AND DURATION

- 3.2.2. One-hour and 24-hour TSP levels should be measured to indicate the impacts of construction dust on air quality. The 24-hour TSP levels shall be measured by following the standard high volume sampling method as set out in the Title 40 of the Code of Federal Regulations, Chapter 1 (Part 50), Appendix B.
- 3.2.3. All relevant data including temperature, pressure, weather conditions, elapsed-time meter reading for the start and stop of the sampler, identification and weight of the filter paper, and any other local atmospheric factors affecting or affected by site conditions, etc., shall be recorded down in detail.
- 3.2.4. For regular impact monitoring, the sampling frequency of at least once in every six-days, shall be strictly observed at all the monitoring stations for 24-hour TSP monitoring. For 1-hour TSP monitoring, the sampling frequency of at least three times in every six-days should be undertaken when the highest dust impact occurs.

SAMPLING PROCEDURE AND MONITORING EQUIPMENT

- 3.2.5. High volume samplers (HVSs) in compliance with the following specifications shall be used for carrying out the 1-hour and 24-hour TSP monitoring:
 - 0.6 1.7 m³ per minute adjustable flow range;
 - Equipped with a timing / control device with +/- 5 minutes accuracy for 24 hours operation;



- Installed with elapsed-time meter with +/- 2 minutes accuracy for 24 hours operation;
- Capable of providing a minimum exposed area of 406 cm2;
- Flow control accuracy: +/- 2.5% deviation over 24-hour sampling period;
- Equipped with a shelter to protect the filter and sampler;
- Incorporated with an electronic mass flow rate controller or other equivalent devices;
- · Equipped with a flow recorder for continuous monitoring;
- Provided with a peaked roof inlet;
- Incorporated with a manometer;
- Able to hold and seal the filter paper to the sampler housing at horizontal position;
- Easily changeable filter; and
- Capable of operating continuously for a 24-hour period.
- 3.2.6. Initial calibration of dust monitoring equipment shall be conducted upon installation and thereafter at bi-monthly intervals. The transfer standard shall be traceable to the internationally recognized primary standard and be calibrated annually. The concern parties such as IEC shall properly document the calibration data for future reference. All the data should be converted into standard temperature and pressure condition.

LABORATORY MEASUREMENT / ANALYSIS

- 3.2.7. A clean laboratory with constant temperature and humidity control, and equipped with necessary measuring and conditioning instruments to handle the dust samples collected, shall be available for sample analysis, and equipment calibration and maintenance. The laboratory should be HOKLAS accredited.
- 3.2.8. Filter paper of size 8" x 10" shall be labelled before sampling. It shall be a clean filter paper with no pinholes, and shall be conditioned in a humidity-controlled chamber for over 24-hours and be pre-weighed before use for the sampling.
- 3.2.9. After sampling, the filter paper loaded with dust shall be kept in a clean and tightly sealed plastic bag. The filter paper shall then be returned to the laboratory for reconditioning in the humidity controlled chamber followed by accurate weighing by an electronic balance with readout down to 0.1 mg. The balance shall be regularly calibrated against a traceable standard.
- 3.2.10. All the collected samples shall be kept in a good condition for 6 months before disposal.

3.3. Water Quality Monitoring

WATER QUALITY MONITORING STATIONS

3.3.1 The water quality monitoring stations for the Project are listed and shown in *Table 3.3* and *Figure 3.1*. *Appendix 3.1* shows the established Action/Limit Levels for the monitoring works.

Table 3.3 Water Quality Monitoring Stations

Station ID	Description	Easting	Northing				
Cooling Wate	Cooling Water Intakes						
M5B Swire / Government Headquarters/ Tam Development/ MTRCL and HSBC Headquarter		835169	816052				
Culverts (Reference Station)							
Culvert J	Culvert J Outfall Location	835082	816071				

WATER QUALITY PARAMETERS

- 3.3.2 Monitoring of dissolved oxygen (DO), turbidity and suspended solids (SS) shall be carried out at WSD flushing water intakes and cooling water intakes. DO and Turbidity are measured insitu while SS is determined in laboratory.
- 3.3.3 In association with the water quality parameters, other relevant data shall also be measured, such as monitoring location/position, time, sampling depth, water temperature, pH, salinity, dissolved oxygen (DO) saturation, weather conditions, sea conditions, tidal stage, and any special phenomena and work underway at the construction site etc.

SAMPLING PROCEDURES AND MONITORING EQUIPMENT

3.3.4 The interval between two sets of monitoring should not be less than 36 hours except where there are exceedances of Action and/or Limit Levels, in which case the monitoring frequency will be increased. *Table 3.4* shows the proposed monitoring frequency and water quality parameters. Duplicate in-situ measurements and water sampling should be carried out in each sampling event. For selection of tides for in-situ measurement and water sampling, tidal range of individual flood and ebb tides should be not less than 0.5m.

Table 3.4 Marine Water Quality Monitoring Frequency and Parameters

Activities	Monitoring Frequency ¹	Parameters ²
During the 4-week baseline monitoring period	Three days per week, at mid- flood and mid-ebb tides	Turbidity, Suspended Solids (SS), Dissolved Oxygen (DO), pH, Temperature, Salinity
During marine construction works	Three days per week, at mid- flood and mid-ebb tides	Turbidity, Suspended Solids (SS), Dissolved Oxygen (DO), pH, Temperature, Salinity

Lam Geotechnics Limited

Contract No. HY/2019/18 Wan Chai Development Phase II and Central Wanchai Bypass - Sampling, Field Measurement and Testing Works (Stage 4) Quarterly EM&A Report (November 2019- January 2020)

Activities	Monitoring Frequency ¹	Parameters ²	
After completion of marine construction works		Turbidity, Suspended Solids (SS), Dissolved Oxygen (DO), pH, Temperature, Salinity	

Notes:

- For selection of tides for in-situ measurement and water sampling, tidal range of individual flood and ebb tides should be not less than 0.5m.
- 2. Turbidity should be measured in situ whereas SS should be determined by laboratory.

DISSOLVED OXYGEN AND TEMPERATURE MEASURING EQUIPMENT

- 3.3.5 The instrument should be a portable, weatherproof dissolved oxygen measuring instrument complete with cable, sensor, comprehensive operation manuals, and use a DC power source. It should be capable of measuring:
 - a dissolved oxygen level in the range of 0-20 mg/l and 0-200% saturation
 - a temperature of 0-45 degree Celsius
- 3.3.6 It should have a membrane electrode with automatic temperature compensation complete with a cable. Sufficient stocks of spare electrodes and cables should be available for replacement where necessary. (e.g. YSI model 59 meter, YSI 5739 probe, YSI 5795A submersible stirrer with reel and cable or an approved similar instrument).
- 3.3.7 Should salinity compensation not be build-in in the DO equipment, in-situ salinity shall be measured to calibrate the DO equipment prior to each DO measurement.

TURBIDITY MEASUREMENT INSTRUMENT

3.3.8 The instrument should be a portable, weatherproof turbidity-measuring instrument complete with comprehensive operation manual. The equipment should use a DC power source. It should have a photoelectric sensor capable of measuring turbidity between 0-1000 NTU (e.g. Hach model 2100P or an approved similar instrument).

SAMPLER

3.3.9 A water sampler comprises a transparent PVC cylinder, with a capacity of not less than 2 litres, and can be effectively sealed with latex cups at both ends. The sampler should have a positive latching system to keep it open and prevent premature closure until released by a messenger when the sampler is at the selected water depth (e.g. Kahlsico Water Sampler or an approved similar instrument).

SAMPLE CONTAINER AND STORAGE

3.3.10 Water samples for suspended solids measurement should be collected in high-density polythene bottles, packed in ice (cooled to 4°C without being frozen), and delivered to ALS Technichem (HK) Pty Ltd. as soon as possible after collection for analysis.



WATER DEPTH DETECTOR

3.3.11 A portable, battery-operated echo sounder shall be used for the determination of water depth at each designated monitoring station. This unit can either be handheld or affixed to the bottom of the workboat, if the same vessel is to be used throughout the monitoring programme.

SALINITY

3.3.12 A portable salinometer capable of measuring salinity in the range of 0-40 ppt shall be provided for measuring salinity of the water at each of monitoring location.

MONITORING POSITION EQUIPMENT

3.3.13 A hand-held or boat-fixed type digital Global Positioning System (GPS) with waypoint bearing indication or other equivalent instrument of similar accuracy shall be provided and used during monitoring to ensure the monitoring vessel is at the correct location before taking measurements.

CALIBRATION OF IN-SITU INSTRUMENTS

- 3.3.14 All in-situ monitoring instrument shall be checked, calibrated and certified by a laboratory accredited under HOKLAS or equivalent before use, and subsequently re-calibrated at 3 monthly intervals throughout all stages of the water quality monitoring. Responses of sensors and electrodes should be checked with certified standard solutions before each use. Wet bulb calibration for a DO meter shall be carried out before measurement at each monitoring location.
- 3.3.15 For the on site calibration of field equipment by the ET, the BS 127:1993, "Guide to Field and on-site test methods for the analysis of waters" should be observed.
- 3.3.16 Sufficient stocks of spare parts should be maintained for replacements when necessary.

 Backup monitoring equipment shall also be made available so that monitoring can proceed uninterrupted even when some equipment is under maintenance, calibration, etc.

LABORATORY MEASUREMENT / ANALYSIS

3.3.17 Analysis of suspended solids has been carried out in a HOKLAS accredited laboratory, ALS Technichem (HK) Pty Ltd. Water samples of about 1L shall be collected at the monitoring stations for carrying out the laboratory SS determination. The SS determination work shall start within 24 hours after collection of the water samples. The SS determination shall follow APHA 19ed or equivalent methods subject to the approval of IEC and EPD.



4. MONITORING RESULTS

- 4.0.1. The environmental monitoring will be implemented based on the division of works areas of each designed project managed under different contracts with separate FEP applied by individual contractors. Overall layout showing work areas of various contracts, latest status of work commencement and monitoring stations is shown in <u>Figure 2.1</u> and <u>Figure 3.1</u>. The monitoring results are presented in according to the Individual Contract(s).
- 4.0.2. In the reporting period, the concurrent contracts are:
 - Contract no. HK/2012/08 Wan Chai Development Phase II Central Wan Chai Bypass at Wan Chai West.

4.1. Noise Monitoring Results

4.1.1 Due to safety concerned, the location of the continuous noise monitoring station at City Hall was finely adjusted to the roof of the City Hall, Low Block on 1 May 2013.

Contract no. HK/2012/08 – Wan Chai Development Phase II – Central – Wan Chai Bypass at Wan Chai West

The proposed division of noise monitoring station is summarized in *Table 4.1* below.

Table 4.1 Continuous Noise Monitoring Station for Contract no. HK/2012/08

Location ID	District	Description
ACL3	Central	City Hall

Remarks: Continuous noise monitoring results and graphical presentation for ACL3 during

4.1.2 As WDII RSS confirmation of construction works completion at CRIII area on 21 October 2019 and agreed with IEC on 1 November 2019, the continuous noise monitoring at ACL3 – City Hall for Contract no. HK/2012/08 under EP-122/2002/E was suspended from 1 November 2019 onward.

4.2. Air Quality Monitoring Results

- 4.2.1 1-hour and 24-hour Total Suspended Particulates (TSP) monitoring were conducted at ACL1 – City Hall and ACL2 – PLA Barracks (ACL2a Contractor HK/2012/08 Site Office since 7 December 2013) on every six days basis.
- 4.2.2 Due to the large scale renovation works at People's Liberation Army Headquarter, a Proposal for Relocation of Air Quality Monitoring Station at People's Liberation Army Headquarter (ACL2) was formally submitted to EPD on 4th November, 2013.



- 4.2.3 Air Quality Monitoring at ACL2 was temporarily suspended during the period from 14th November, 2013 to 3rd December, 2013.
- 4.2.4 The Proposal for Relocation of Air Quality Monitoring Station at People's Liberation Army Headquarter (ACL2) was approved by EPD on 27 November 2013.
- 4.2.5 According to the approved proposal for relocation of Air Quality Monitoring station, the action and limit levels of ACL2a shall adopt the reference monitoring result from the baseline air monitoring report for EP/364/2009 in 22 April 2010 in which approved by EPD.
- 4.2.6 The air quality monitoring at ACL2a Contractor HK/2012/08 Site Office was commenced on 7 December 2013.

Contract no. HK/2012/08 – Wan Chai Development Phase II – Central – Wan Chai Bypass at Wan Chai West

4.2.7 The proposed division of air quality monitoring stations are summarized in *Table 4.3* below.

Table 4.3 Air Quality Monitoring Stations for Contract no. HK/2012/08

Station	Description	
ACL1	City Hall	
ACL2a	Contractor HK/2012/08 Site Office	

4.2.8 As WDII RSS confirmation of construction works completion at CRIII area on 21 October 2019 and agreed with IEC on 1 November 2019, the air quality monitoring at ACL1 – City Hall and ACL2a – Contractor HK/2012/08 Site Office for Contract no. HK/2012/08 under EP-122/2002/E was suspended from 1 November 2019 onward.

4.3. Water Quality Monitoring Results

4.3.1 The proposed division of water quality monitoring stations are summarized in *Table 4.5* below.

Table 4.5 Water Quality Monitoring Station for Contract no. HK/2012/08

Station ID	Description		
Cooling Water In	Cooling Water Intakes		
Swire / Government Headquarters/ Tamar Development/ MT M5B and HSBC Headquarters			
Culverts (Reference Station)			
Culvert J	Culvert J Outfall Location		

- 4.3.2 Water quality monitoring at M5B and Culvert J were conducted three days per week during reporting period starting form 26 September 2014.
- 4.3.3 With respect to the confirmation of completion of marine work by WDII RSS, the water quality monitoring at M5B and Culvert J was temporary suspended from 23 August 2019 onward after completion of 4 weeks post-construction monitoring and with agreement from IEC.

4.4. Waste Monitoring Results

<u>Contract no. HK/2012/08 – Wan Chai Development Phase II – Central – Wan Chai Bypass at Wan Chai West</u>

4.4.1 No Inert and Non-inert C&D wastes were disposed in this reporting period. Details of the waste flow table are summarized in *Table 4.6*

Table 4.6 Details of Waste Disposal for Contract no. HK/2012/08

Waste Type	Quantity this quarter	Cumulative Quantity-to-Date	Disposal / Dumping Grounds
Inert C&D materials disposed, m3	0	8005 51779	TM38 TKO137
Inert C&D materials recycled, m3	NIL	NIL	NIL
Non-inert C&D materials disposed, m3	0	1925	SENT Landfill
Non-inert C&D materials recycled, m3	NIL	NIL	NIL
Chemical waste disposed, kg	NIL	NIL	NIL

5. COMPLIANCE AUDIT

5.0.1. The Event Action Plan for construction noise and air quality are presented in *Appendix 5.1*.

5.1. Noise Monitoring

<u>Contract no. HK/2012/08 – Wan Chai Development Phase II – Central – Wan Chai Bypass at</u> Wan Chai West

5.1.1 As WDII RSS confirmation of construction works completion at CRIII area on 21 October 2019 and agreed with IEC on 1 November 2019, the continuous noise monitoring at ACL3 – City Hall for Contract no. HK/2012/08 under EP-122/2002/E was suspended from 1 November 2019 onward.

5.2. Air Quality Monitoring

<u>Contract no. HK/2012/08 – Wan Chai Development Phase II – Central – Wan Chai Bypass at</u> Wan Chai West

5.2.1 As WDII RSS confirmation of construction works completion at CRIII area on 21 October 2019 and agreed with IEC on 1 November 2019, the air quality monitoring at ACL1 – City Hall and ACL2a – Contractor HK/2012/08 Site Office for Contract no. HK/2012/08 under EP-122/2002/E was suspended from 1 November 2019 onward.

5.3. Water Quality Monitoring

Contract no. HK/2012/08 – Wan Chai Development Phase II – Central – Wan Chai Bypass at Wan Chai West

5.3.1 With respect to the confirmation of completion of marine work by WDII RSS, the water quality monitoring at M5B and Culvert J was temporary suspended from 23 August 2019 onward after completion of 4 weeks post-construction monitoring and with agreement from IEC.

5.4. Site Audit

5.4.1 As WDII RSS confirmation of construction works completion at CRIII area on 21 October 2019 and agreed with IEC on 1 November 2019, the weekly environmental site inspection for Contract no. HK/2012/08 under EP-122/2002/E was suspended from 1 November 2019 onward.



5.5. Review of the Reasons for and the Implications of Non-compliance

5.5.1 As WDII RSS confirmation of construction works completion at CRIII area on 21 October 2019 and agreed with IEC on 1 November 2019, the weekly environmental site inspection for Contract no. HK/2012/08 under EP-122/2002/E was suspended from 1 November 2019 onward.

5.6. Summary of action taken in the event of and follow-up on non-compliance

5.6.1 As WDII RSS confirmation of construction works completion at CRIII area on 21 October 2019 and agreed with IEC on 1 November 2019, the weekly environmental site inspection for Contract no. HK/2012/08 under EP-122/2002/E was suspended from 1 November 2019 onward.

5.7. Mitigation measures implemented to prevent muddy discharge and surface runoff

5.7.1 In respect to EPD concern on muddy discharge and surface runoff from construction works during wet season, the following mitigation measures was implemented by Contractor(s):

Contract No.	Mitigation Measures implemented
HK/2012/08	• Nil

6. COMPLAINTS, NOTIFICATION OF SUMMONS AND PROSECUTION

- 6.0.1. No environmental complaint was received in this reporting quarter.
- 6.0.2. The details of cumulative complaint log and summary of complaints are presented in <u>Appendix 6.1.</u>
- 6.0.3. No notification of summons or prosecution was received in the reporting period. Cumulative statistic on complaints and successful prosecutions are summarized in *Table 6.1* and *Table 6.2* respectively.

Table 6.1 Cumulative Statistics on Complaints

Reporting Period	No. of Complaints
Commencement works to last reporting quarter	5
November 2019 – January 2020	0
Project-to-Date	5

Table 6.2 Cumulative Statistics on Successful Prosecutions

Environmental Parameters	Cumulative No. Brought Forward	No. of Successful Prosecutions this quarter (Offence Date)	Cumulative No. Project-to-Date
Air	-	0	0
Noise	-	0	0
Water	-	0	0
Waste	-	0	0
Total	-	0	0



7. CUMULATIVE CONSTRUCTION IMPACT DUE TO THE CONCURRENT PROJECTS

- 7.0.1. This section addresses the relevant cumulative construction impact due to the concurrent activities of the current projects including the Central Reclamation Phase III (CRIII), Wan Chai Development Phase II (WDII), Central-WanChai Bypass (CWB), Island Eastern Corridor Link projects (IECL) and Wan Chai Development Phase II Central Wan Chai Bypass at Wan Chai East (CWB Tunnel).
- 7.0.2. According to the Final EM&A report of Central Reclamation Phase III (CRIII) for Contract HK 12/02, the major construction activities were completed by end of January 2014 and no construction activities were undertaken thereafter and the water quality monitoring was completed in October 2011. As such, it is considered that there were no cumulative construction impact due to the concurrent activities of the current projects with the Central Reclamation Phase III (CRIII) undertaken by contractor HK12/02 in the reporting period.
- 7.0.3. According to the construction programme of Central-Wanchai Bypass at Wanchai West at the Central Reclamation Phase III area, no works was conducted in January 2020 reporting period. In view of the above, the cumulative construction impact due to the Central Reclamation Phase III (CRIII) was not anticipated.
- 7.0.4. According to the construction programme of Wan Chai Development Phase II, Central-Wan Chai Bypass and Island Eastern Corridor Link projects, no construction activities under Wan Chai Development Phase II was conducted at Wan Chai. The major construction activities under Central-Wan Chai Bypass and Island Eastern Corridor Link Projects were ventilation building ABWF works at Central; seabed reinstatement at Causeway Bay; road works, drainage improvement work, utility diversion works and landscape works at Victoria Park; bridge noise enclosure installation works, road works, drainage works, soft landscape works and ventilation building ABWF work at North Point area in the reporting period. In addition, other non-Wan Chai Development Phase II, Central-Wan Chai Bypass and Island Eastern Corridor Link projects were observed undertaken at Wan Chai North and North Point area.
- 7.0.5. As relevant site mitigation measures for air quality and construction noise were implemented, no significant air quality impact and noise impact from construction activities was concluded in the reporting period. Besides, no construction work was conducted at EP-122 area in the reporting period. Thus, it is evaluated that the cumulative construction impact from the concurrent projects including Wan Chai Development Phase II (WDII), Central- WanChai Bypass (CWB), Island Eastern Corridor Link projects (IECL) was insignificant.



8. CONCLUSION


- 8.0.1. The EM&A programme was carried out in accordance with the EM&A Manual requirements, minor alterations to the programme proposed were made in response to changing circumstances.
- 8.0.2. No non-compliances were noted and no prosecutions were received during the reporting period.
- 8.0.3. Termination of EM&A programme (Construction Period) under EM&A Manual section 8.5.1 & 8.5.2 is in progress.
- 8.0.4. The construction programmes of individual contracts are provided in *Appendix 8.1*.

Figure 2.1

Project Layout


Studies, Site Investigation, Design and Construction SUPPLEMENTARY AGREEMENT NO. 2 TO AGREEMENT No. CE 15/94

英雄順 周公司 Atkins China Ltd

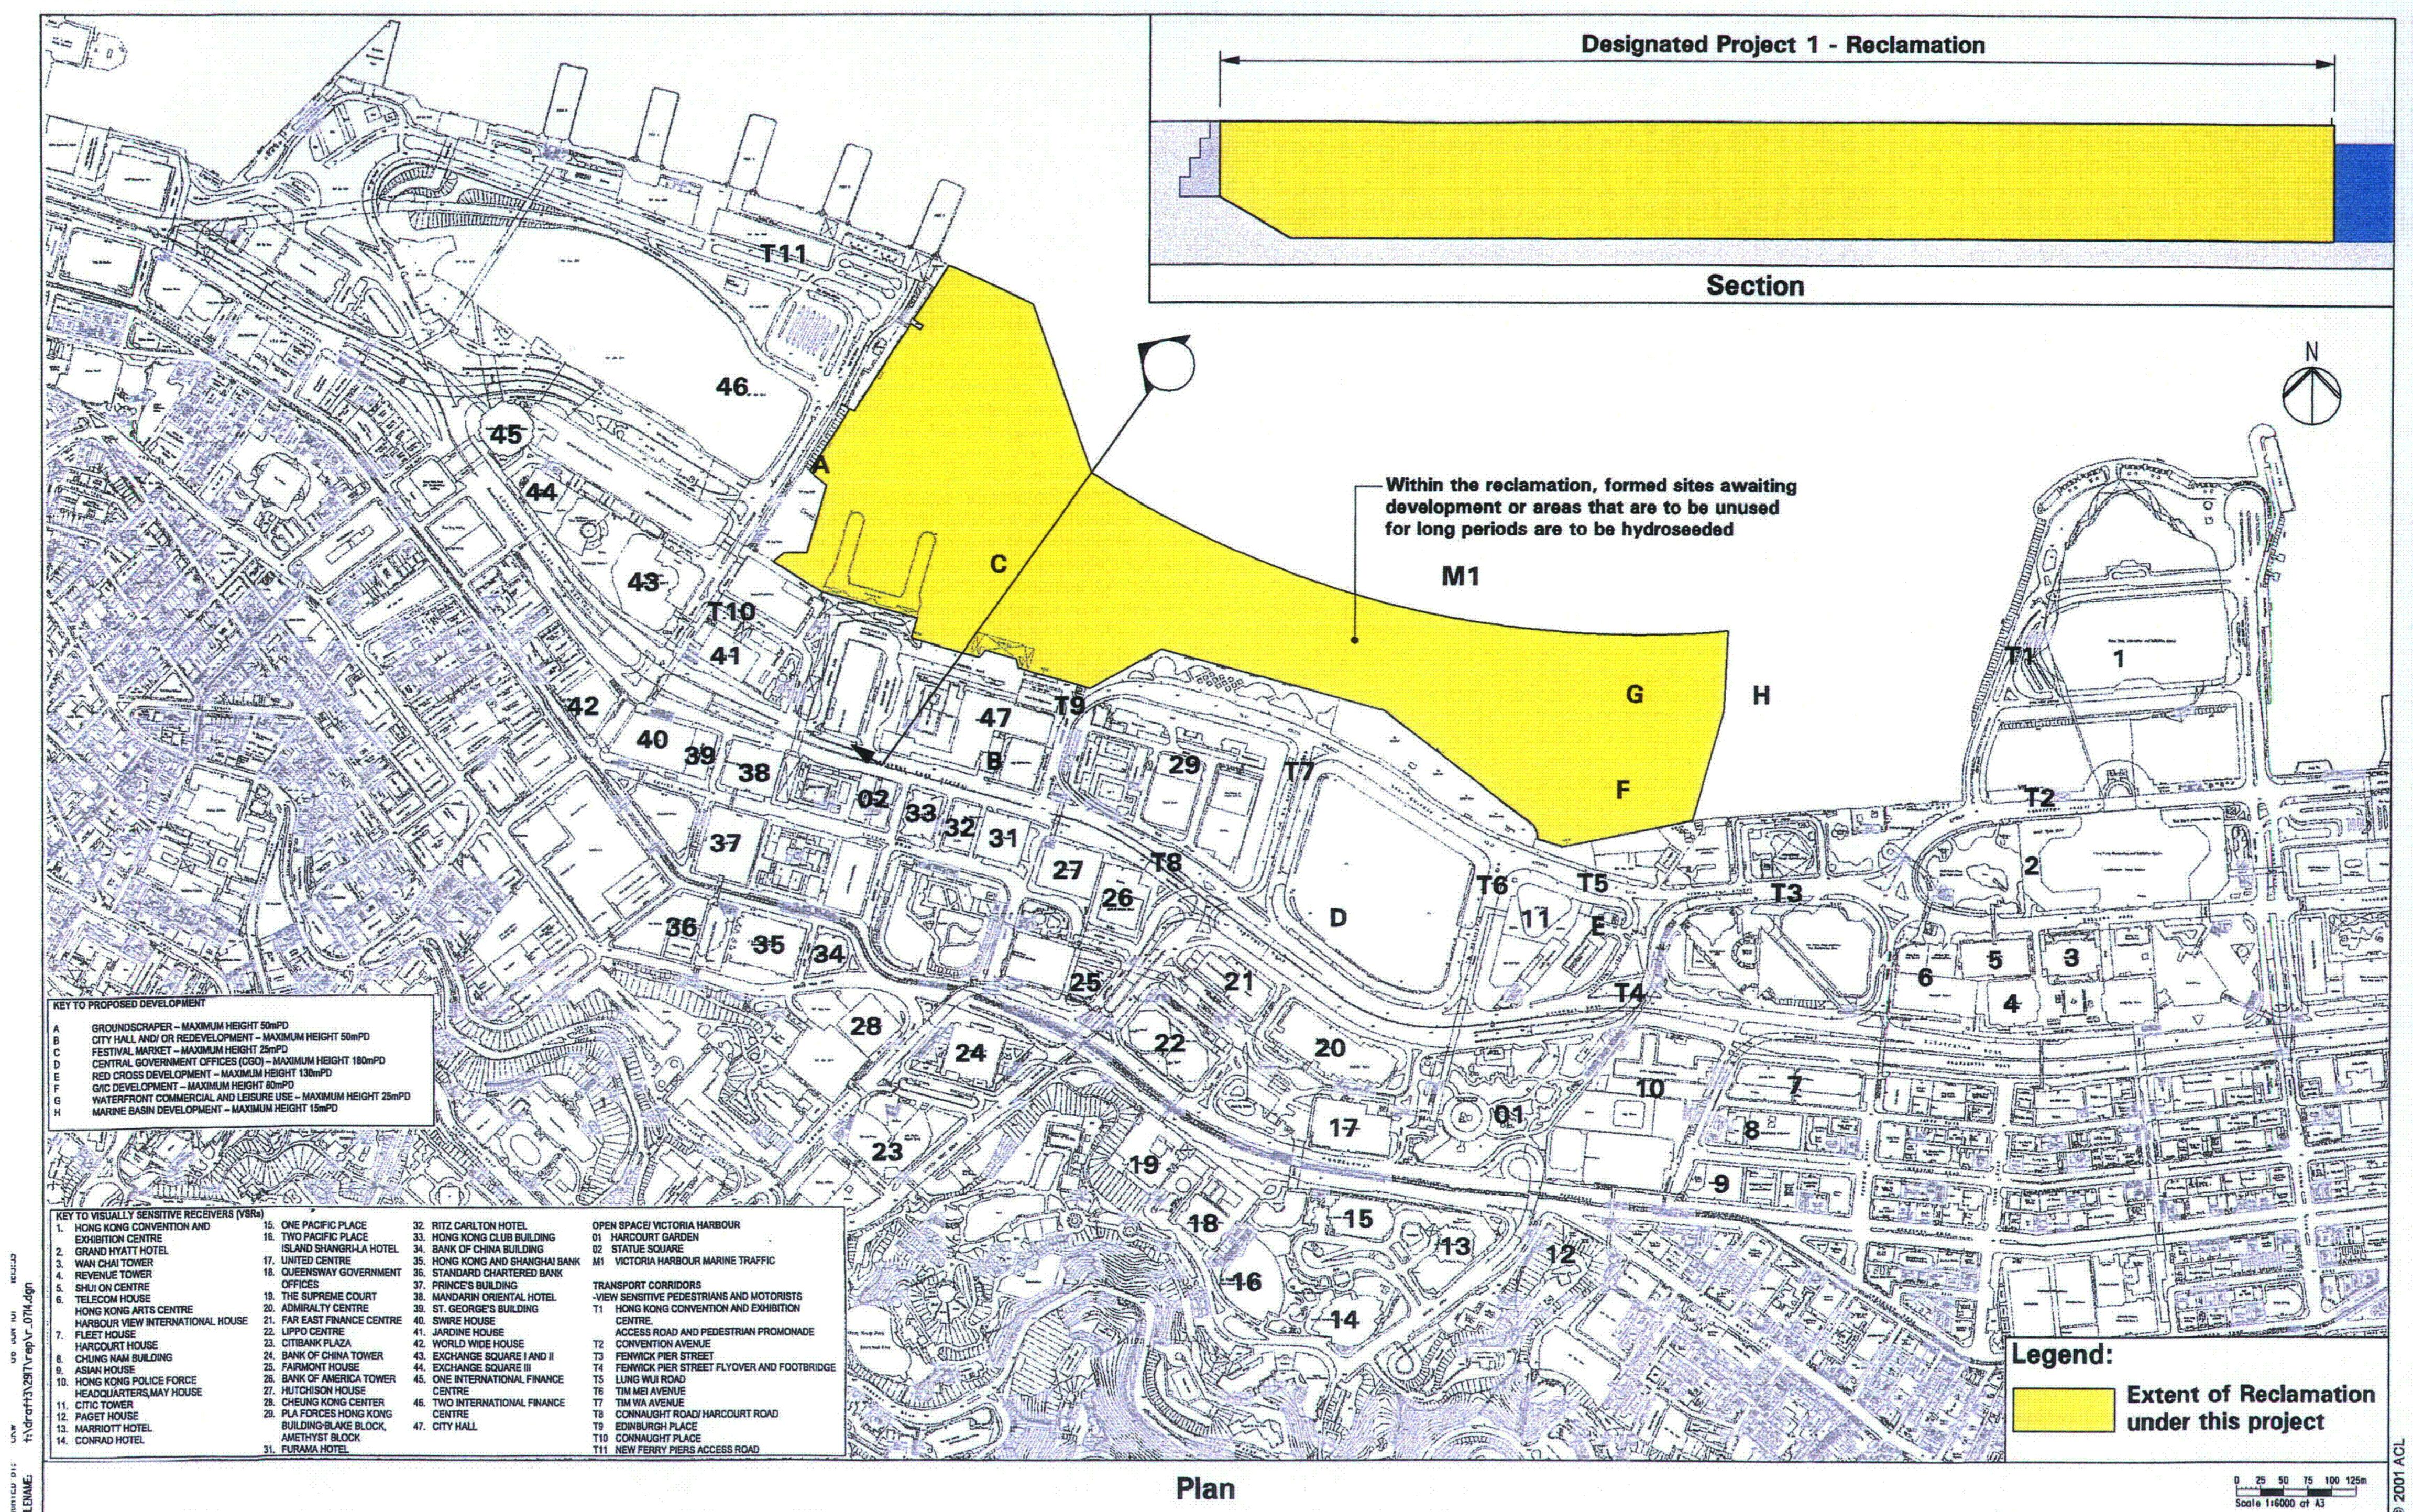


Studies, Site Investigation, Design and Construction SUPPLEMENTARY AGREEMENT NO. 2 TO AGREEMENT No. CE 15/94

菜 建 旗 間 公 司 Alkins China Ltd

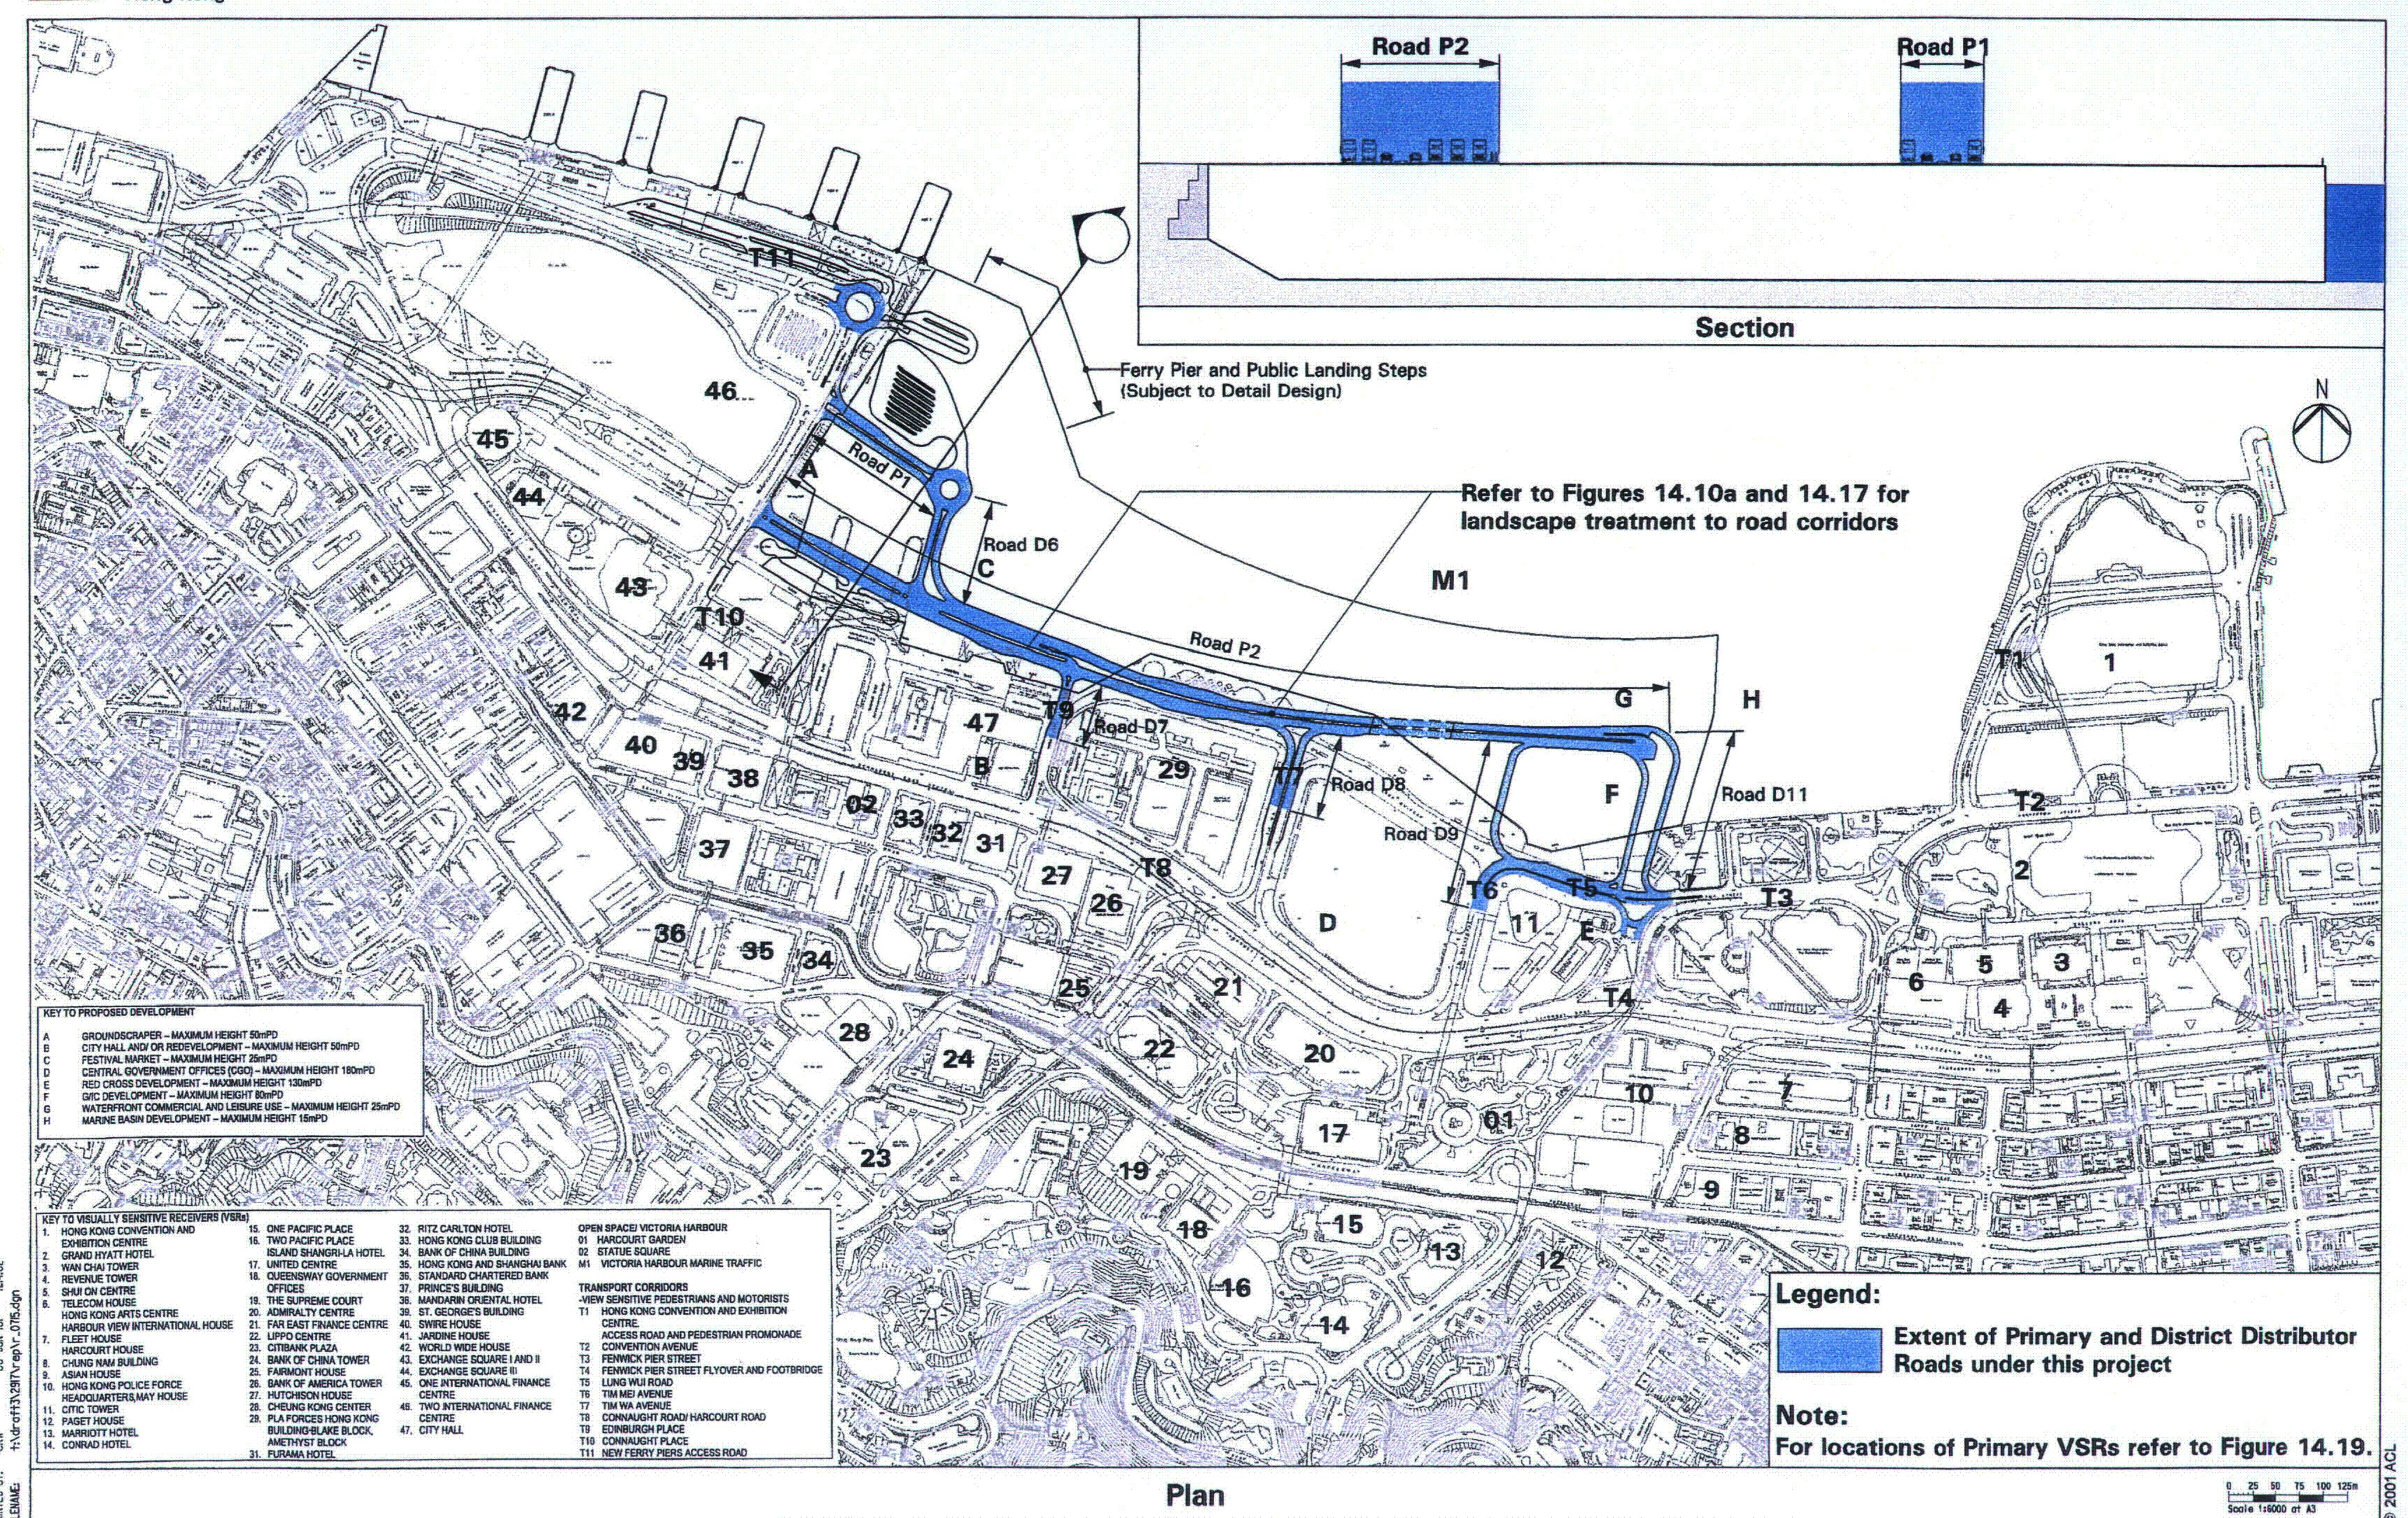

Studies, Site Investigation, Design and Construction SUPPLEMENTARY AGREEMENT NO. 2 TO AGREEMENT No. CE 15/94

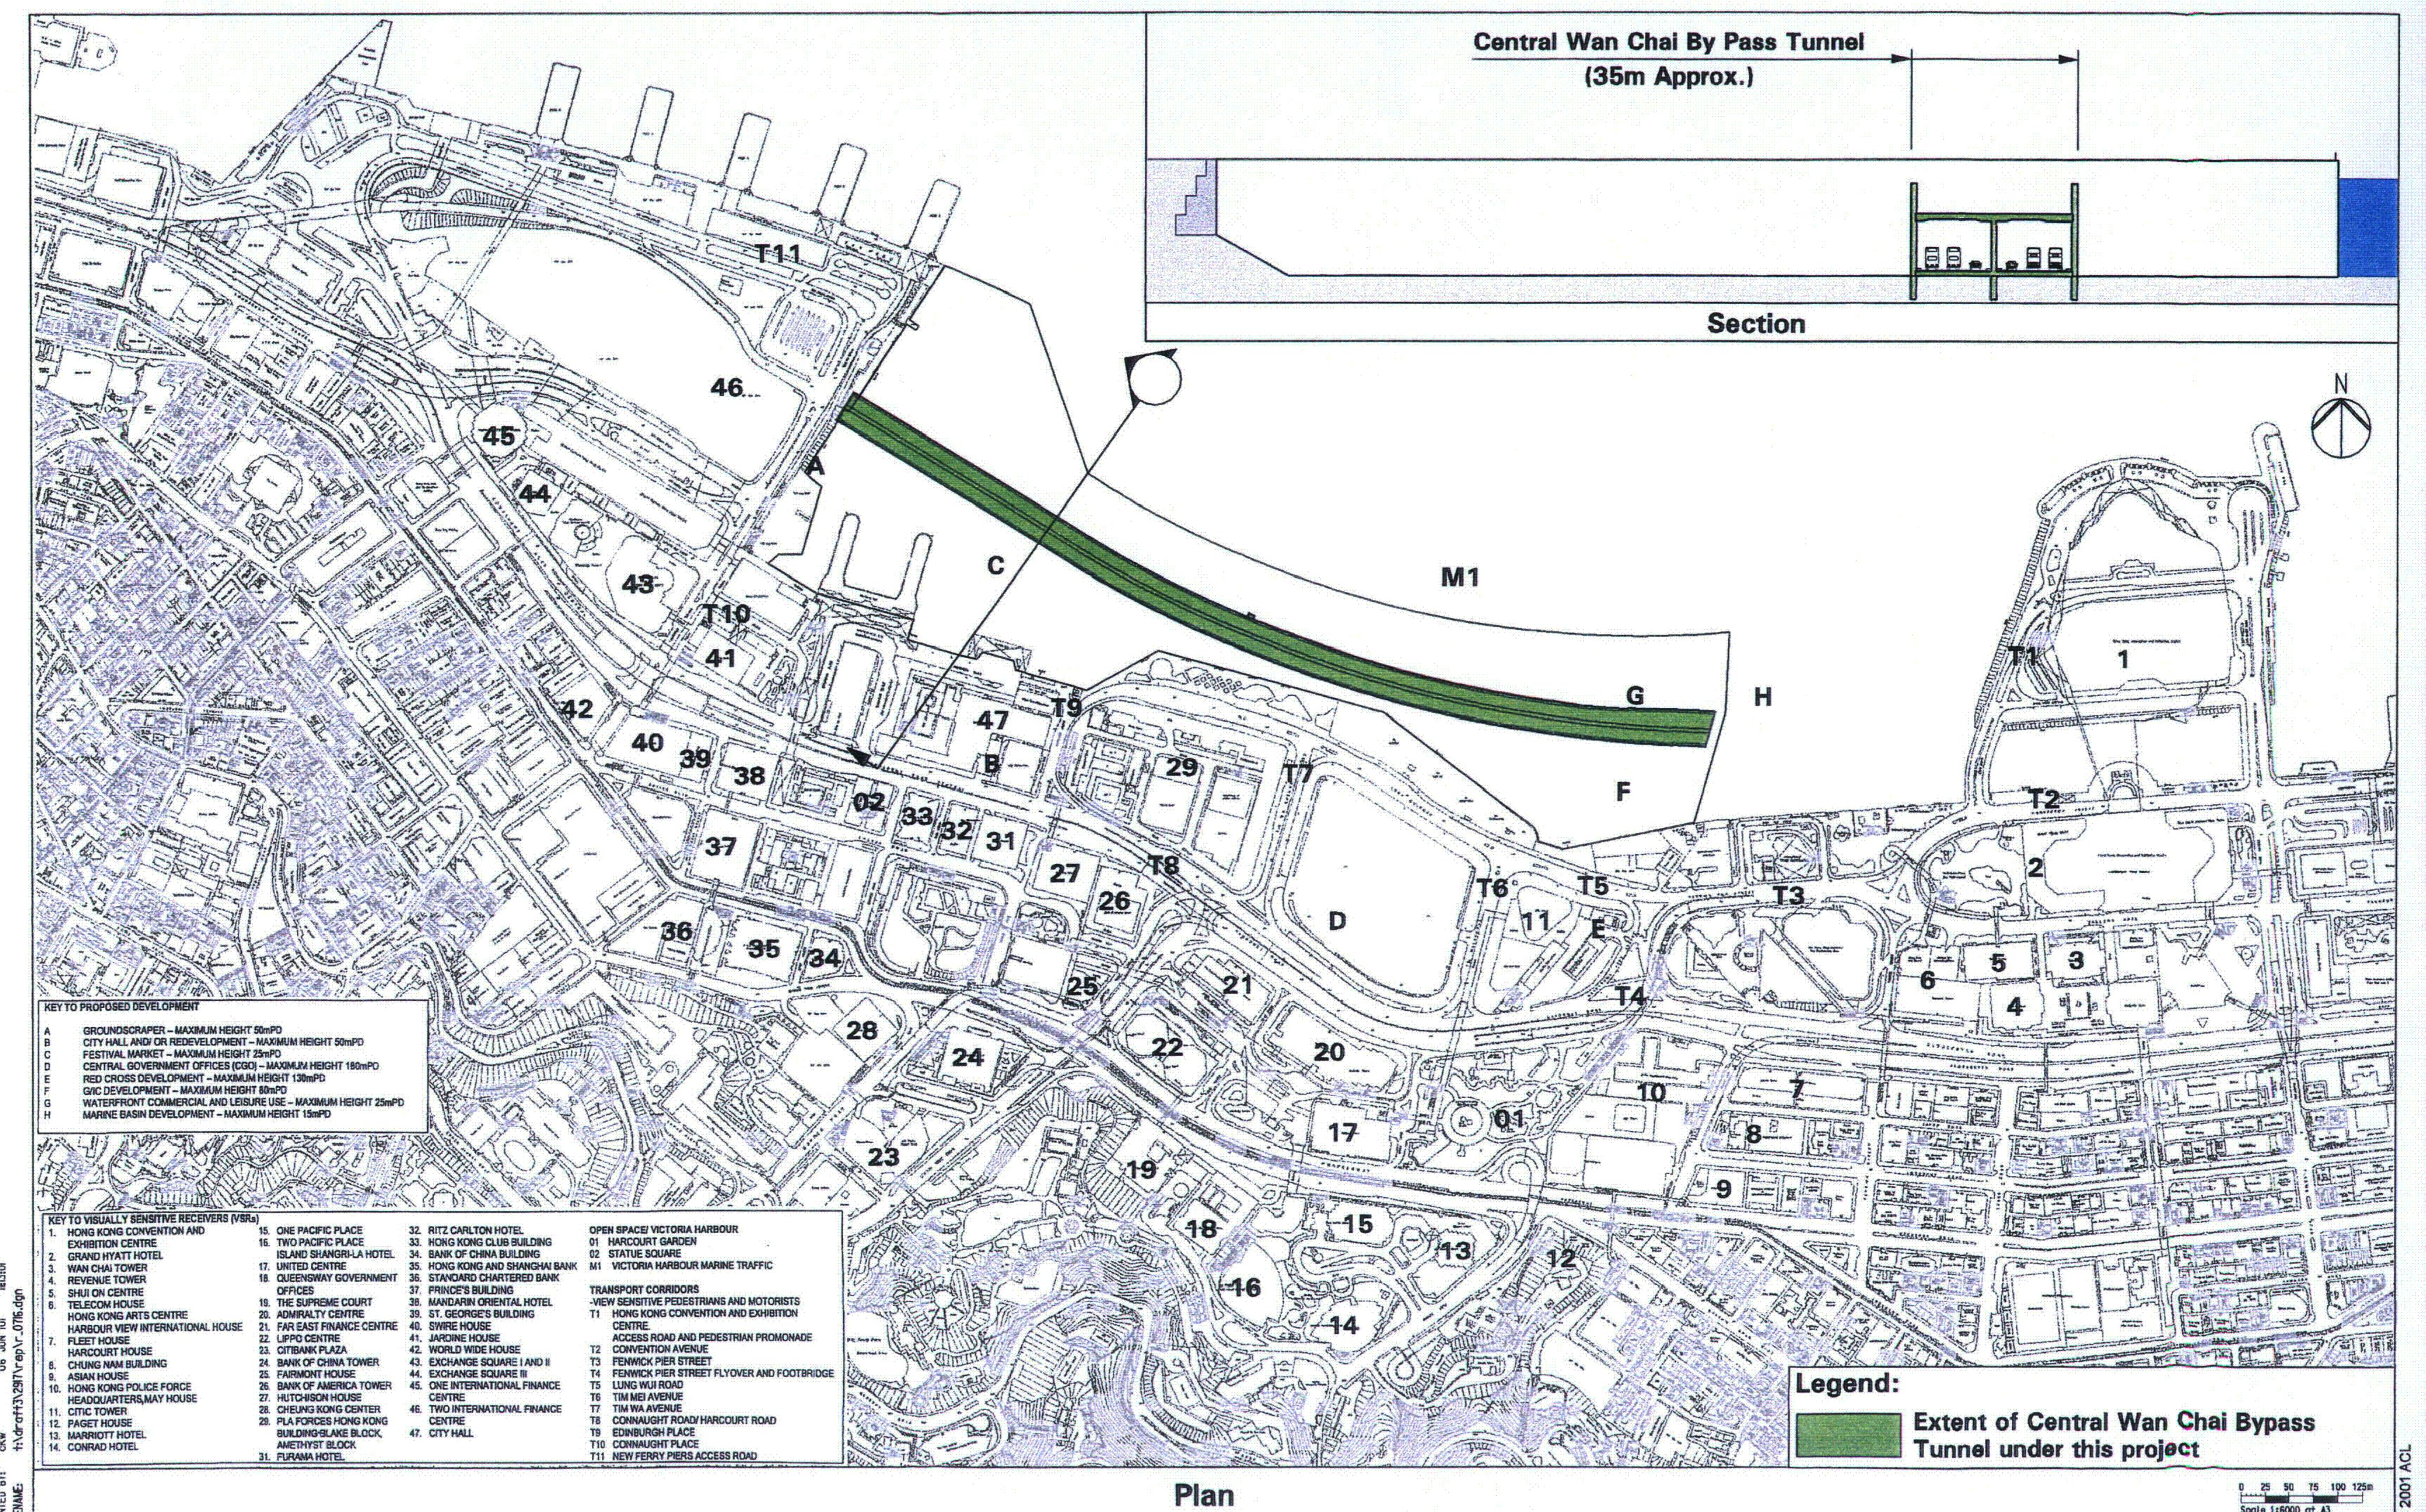

Studies, Site Investigation, Design and Construction SUPPLEMENTARY AGREEMENT NO. 2 TO AGREEMENT No. CE 15/94

菜 建 順 問 公 司 Atkins China Ltd

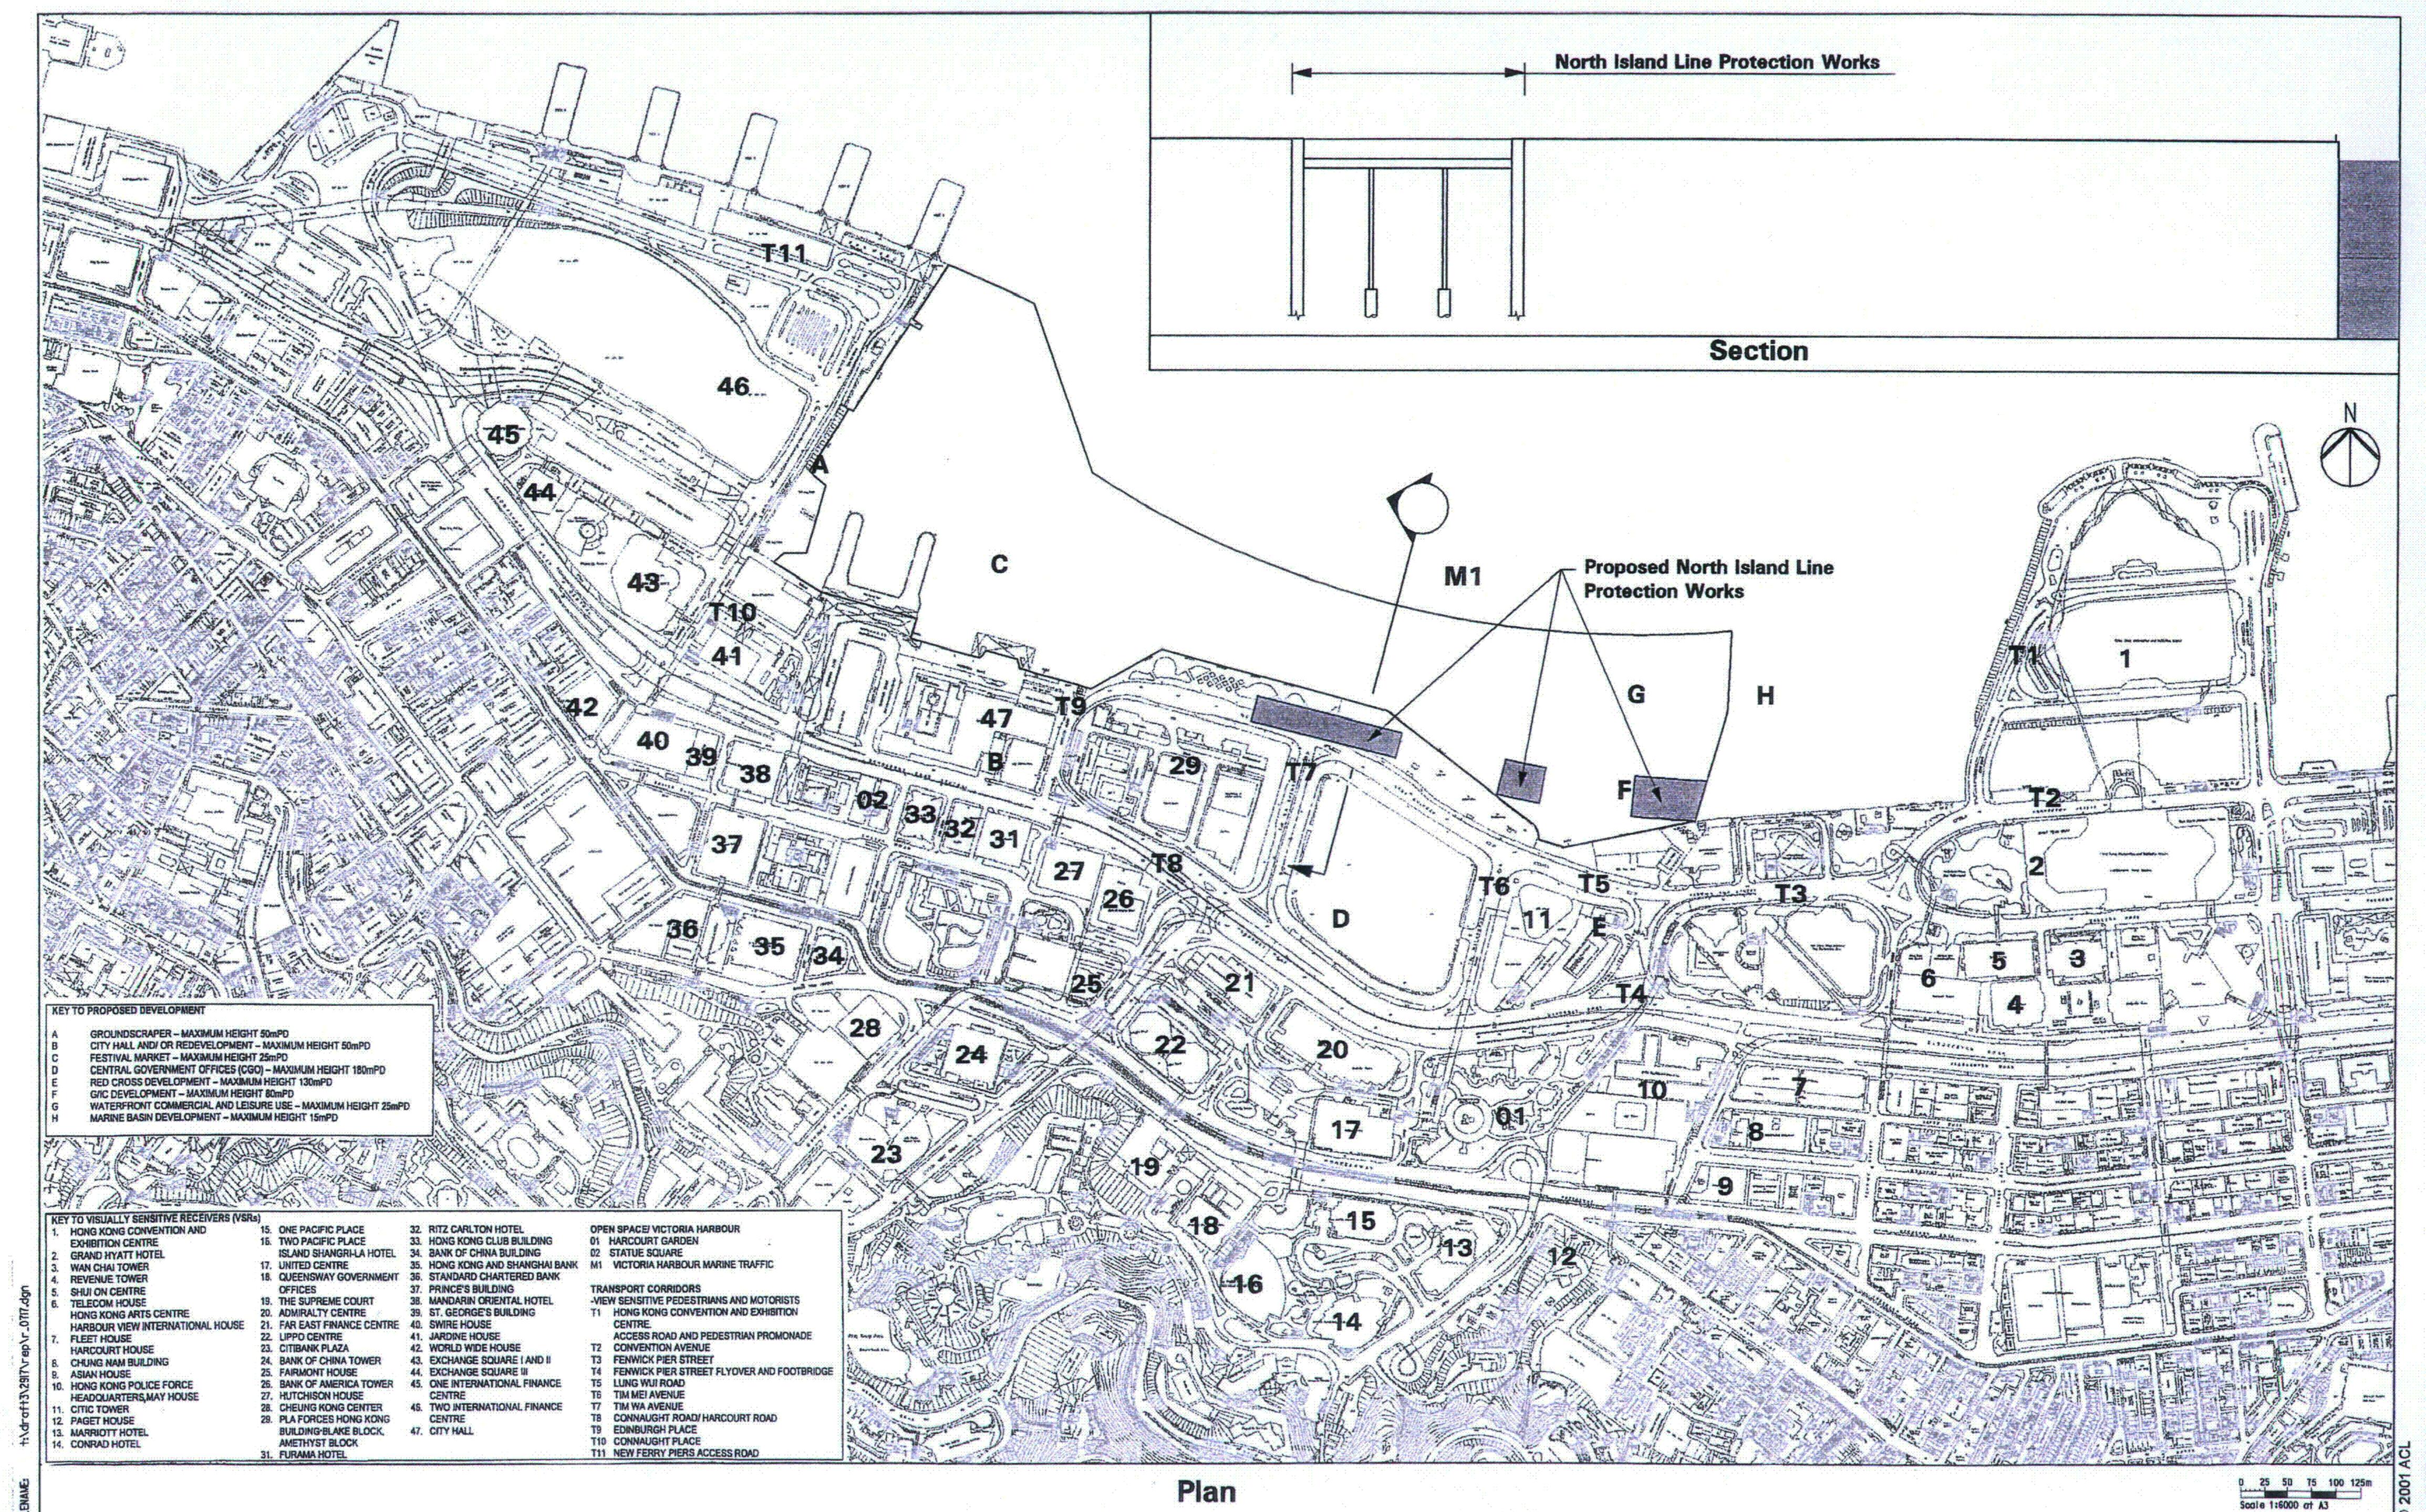


Figure 2.2

Project Organization Chart

Project Organization Chart



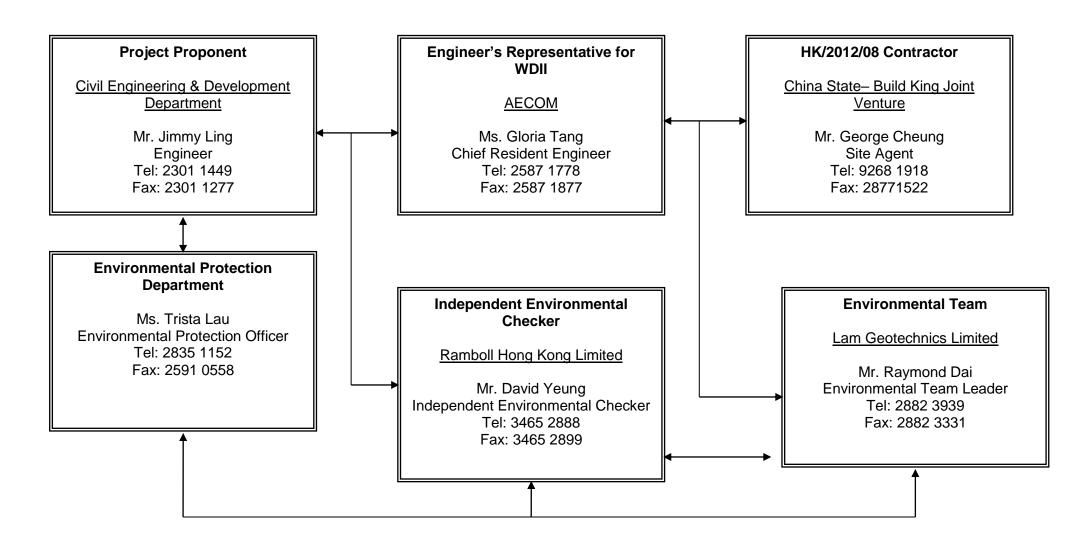


Figure 3.1

Locations of Environmental Monitoring Stations

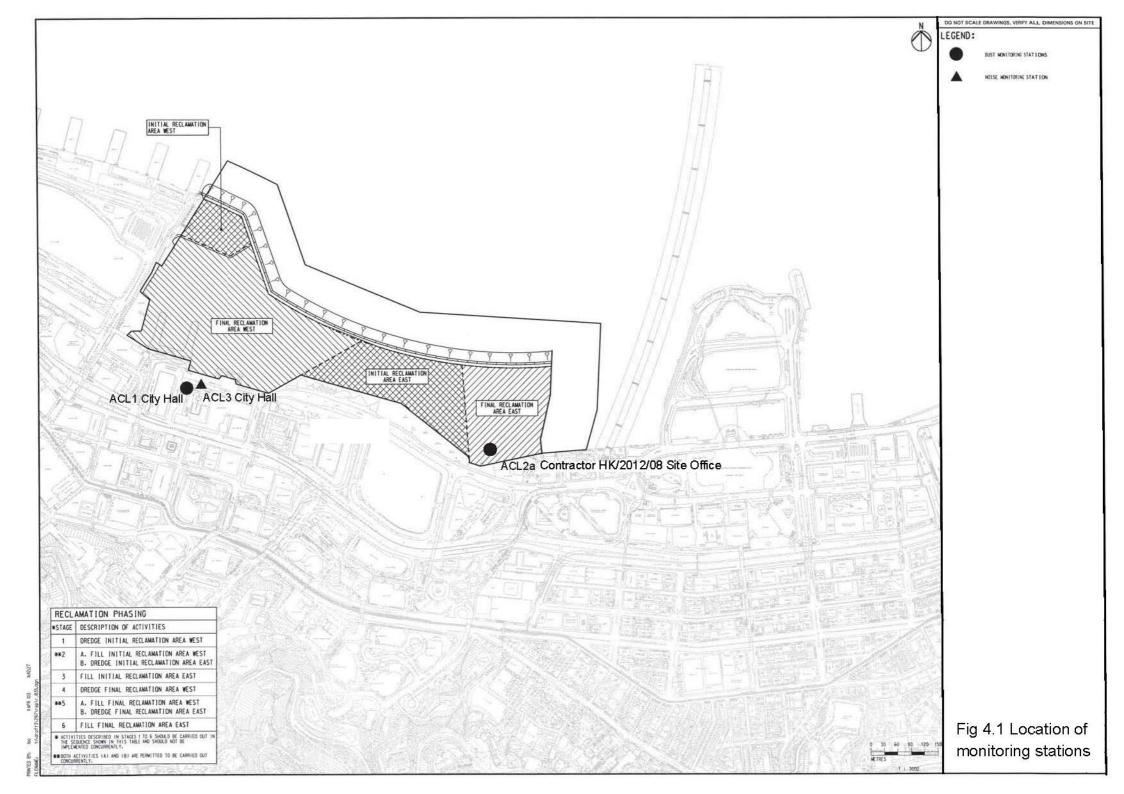

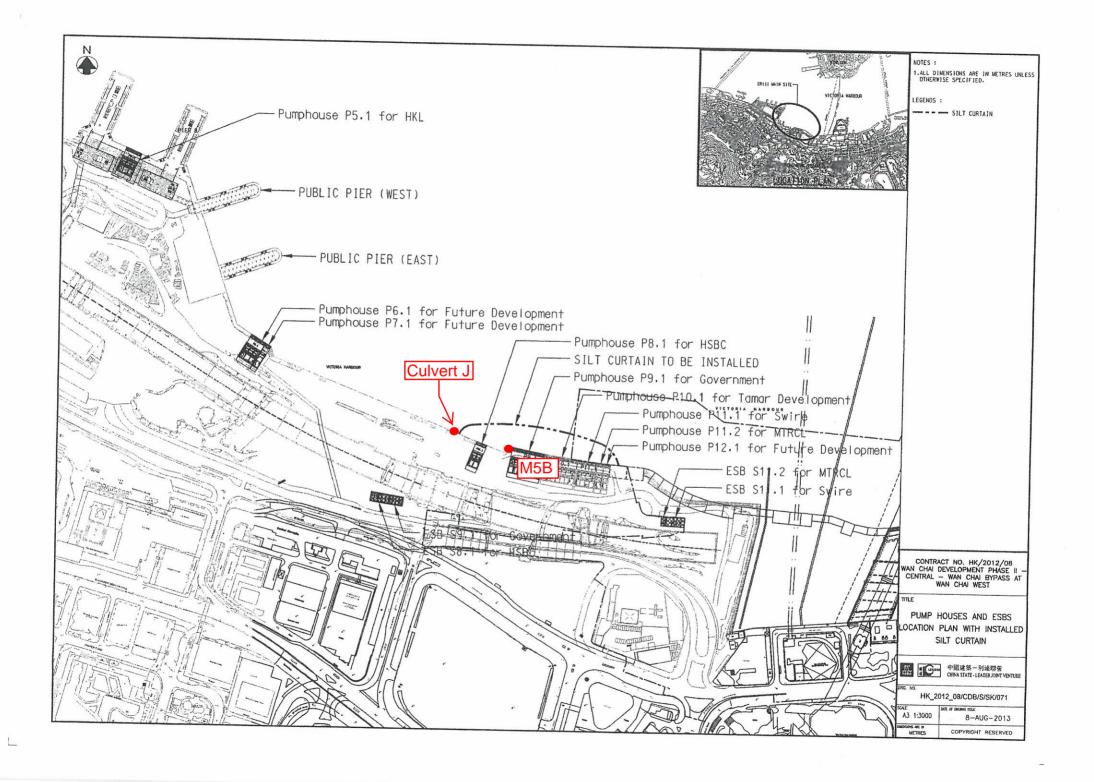

Appendix 2.1

Environmental Mitigation Implementation Schedule

IMPLEMENTATION SCHEDULE OF THE PROPOSED MITIGATION MEASURES

No.	Activity	Mitigation/EIA Recommendations	Responsibility for Implementation	Location Duration completion of measures	Implementation Status	Permit Conditions apply to	Relevant Guidelines Legislation
1	Operational Traffic Noise*	The openings of ventilation buildings or ventilation shafts should be placed carefully and ideally should be such that they are not facing directly onto any NSR.	Various	Area Wide, Proposals at design stage for Implementation during construction	To be implemented at the operation stage	N/A	
2	Operational Air Quality	Air intakes for commercial/G/IC buildings should be placed such that they are at locations where contours indicate AQOs are met.	ArchSD/Private sector +	CRIII During development of sites Completion of CRIII	To be implemented at the operation stage	Carry forward to design stage	6
3	Operational Water Quality	Provision of grit traps for surface drainage	TDD's Contractor	New roads and paved areas During construction End of construction	Implemented during Construction Stage	P, R, A, C	7
4	Operational Landscape and Visual	Operational stage landscape and visual mitigation measures should include +					
		 Implementation of the Waterfront Promenade, Statue Square Corridor, Historic Corridor, Civic Corridor, Arts and Entertainment Corridor, Streetscape Network, Landscape Decks, and Supplementary Landscape Spaces; provision of a legible, integrated pedestrian circulation system linking major activity nodes, reinforcing links with adjoining areas, and providing an international quality hard and soft landscape treatment; provision of a grade separated pedestrian system to minimise vehicular/ pedestrian conflict; provision of an integrated network of local and regional open spaces for passive and 	Various	Area wide, proposals at design stage for implementation during construction	To be implemented at the operation stage	Р	- -
		active recreation; - preservation of selected architectural features;					



No.	Activity	Mitigation/EIA Recommendations	Responsibility for Implementation	Location Duration completion of measures	Implementation Status	Permit Conditions apply to	Relevant Guidelines Legislation
		 preservation insitu of existing significant vegetation, principally the two Banyan Trees flanking the Tamar Site; new roads to incorporate suitable streetscape amenity and landscape planting to minimise visual and environmental impacts; existing roads upgraded to 'marry' with the proposed landscape framework; Hydroseeding of reclamation if there is no immediate use of the site, periphery of the reclamation; Designated service corridors beneath footpaths to prevent potential impacts upon vegetation during services maintenance; Sensitively designed colour themes to footpath paving areas; and Sensitively designed seawall to enhance the recreational value of the future promenade 	Various	Area wide, proposals at design stage for implementation during	To be implemented at	Р	
		can be included.		construction	the operation stage		
5	Construction Noise Control Requirements	Use of the following quiet mechanical equipment for construction works: ·air compressor; paver; hand held breaker; breaker, excavator mounted; bulldozer; concrete lorry mixer; concrete pump; crane; dump truck; excavator/ loader; grader; lorry; poker; road roller; vibratory roller;	TDD's Contractor	Works Area During construction End of construction	Implemented during Construction Stage	P, R, A, C	-
		Use of noise barriers (in the form if purpose built site hoarding of 3 - 5 m height and surface density of at least 7 kgm² with cranked top) for the following works: Hong Kong Station Extended Overrun Tunnels to north of Central Barracks. North Island Line Protection Works to north of Central Barracks; Road/Drainage Works to north of Central Barracks; Culvert F Piling Works to north of City Hall.	TDD's Contractor	Work Sites as stated Start of activity stated End of activity stated	Implemented during Construction Stage	P, A	
		Only well-maintained plant should be operated on-site and plant should be serviced regularly during the construction programme.	TDD's Contractor	Works Area During construction End of construction	Implemented during Construction Stage	P,R,A,C	4
		Silencers or mufflers on construction equipment should be utilised and should be properly maintained during the construction programme.	TDD's Contractor	Works Area During construction End of construction	Implemented during Construction	P,R,A,C	4



No.	Activity	Mitigation/EIA Recommendations	Responsibility for Implementation	Location Duration completion of measures	Implementation Status	Permit Conditions apply to	Relevant Guidelines Legislation
					Stage		
		Mobile plant, if any, should be sited as far away from noise sensitive facilities as possible.	TDD's Contractor	Works Area During construction End of construction	Implemented during Construction Stage	P,R,A,C	4
		· Machines and plant (such as trucks) that may be in intermittent use should be shut down between works periods or should be throttled down to a minimum.	TDD's Contractor	Works Area During construction End of construction	Implemented during Construction Stage	P,R,A,C	4
		Plant known to emit noise strongly in one direction should, wherever possible, be orientated so that the noise is directed away from nearby noise sensitive facilities.	TDD's Contractor	Works Area During construction End of construction	Implemented during Construction Stage	P,R,A,C	4

No.	Activity	Mitigation/EIA Recommendations	Responsibility for Implementation	Location Duration completion of measures	Implementation Status	Permit Conditions apply to	Relevant Guidelines Legislation
		Material stockpiles and other structures should be effectively utilised, wherever practicable, in screening noise from on-site construction activites.	TDD's Contractor	Works Area During construction End of construction	Implemented during Construction Stage	P,R,A,C	4
6	Construction Air Quality Control Requirements	Strictly limit truck speed on site to below 10 km per hour and water spraying to keep the haul roads in wet condition.	TDD's Contractor	Works Area During construction End of construction	Implemented during Construction Stage	P,R,A,C	6,7
		Twice daily watering of the site with active operations when the weather and the work site are dry.	TDD's Contractor	Works Area During construction End of construction	Implemented during Construction Stage	P,R,A,C	6,7
		Watering during excavation and material handling.	TDD's Contractor	Works Area During construction End of construction	Implemented during Construction Stage	P,R,A,C	6,7
		· Provision of vehicle wheel and body washing facilities at the exit points of the site, combined with cleaning of public roads where necessary.	TDD's Contractor	Works Area During construction End of construction	Implemented during Construction Stage	P,R,A,C	6,7
		·Tarpaulin covering of all dusty vehicle loads transported to, from and between site locations.	TDD's Contractor	Works Area During construction End of construction	Implemented during Construction Stage	P,R,A,C	6,7
		· Covers for dusty stockpiles	TDD's Contractor	Works Area During construction End of construction	Implemented during Construction Stage	P,R,A,C	6
		· All plant shall be maintained to prevent any undue air emissions	TDD's Contractor	Works Area During construction End of construction	Implemented during Construction	P,R,A,C	6



No.	Activity	Mitigation/EIA Recommendations	Responsibility for Implementation	Location Duration completion of measures	Implementation Status	Permit Conditions apply to	Relevant Guidelines Legislation
					Stage		
7	Construction W ater Quality Control Requirements	Specific Measures Associated with Dredging Works the use of closed clamshell (water-tight) grab dredgers to remove seriously contaminated material such that the amount of SS and other pollutants released from the marine mud and pore water can be minimised;	TDD's Contractor	Whole reclamation area During reclamation works End of reclamation works	Implemented during Construction Stage	R	7
		 the prohibition of stockpiling of any moderately or seriously contaminated marine sediment, and careful control of stockpiling of any uncontaminated sediment to prevent runoff, resuspension and odour nuisances; and 					
		 the control of dredging and bulk reclamation filling rates within acceptable limits. Based upon the construction sequence developed for this study the maximum dredging and filling rates adopted for Final Reclamation Area East were : Maximum Dredging Rate : 184 m²/hour Maximum Daily Filling Rate : 17,727 m³/day 					
		(for bulk reclamation filling) Maximum dredging and filling rates for other reclamation sites should take account of information contained in Table 10.14 of the EIA Report and envisaged construction sequence.					
		no dredging should take place under very bad weather conditions.					
		 silt curtain around dredging sites to be provided as necessary. Specific Measure for Marine Disposal of Dredged Materials and Maine Sand Filling Works 	TDD's Contractor	Whole reclamation area During reclamation works End of reclamation works	Implemented during Construction Stage	R	7
		- all vessels should be sized such that adequate clearance is maintained between vessels and the sea bed at all states of the tide to ensure that undue turbidity is not generated by turbulence from vessel movement or propeller wash;					
		all hopper barges and dredgers should be fitted with tight fitting seals to their bottom openings to prevent leakage of material;					
		· loading of hopper barges should be controlled to prevent splashing of dredged or filling					



No.	Activity	Mitigation/EIA Recommendations	Responsibility for Implementation	Location Duration completion of measures	Implementation Status	Permit Conditions apply to	Relevant Guidelines Legislation
		material to the surrounding water, and barges or hoppers should not be filled to a level which will cause the overflow of materials or polluted water during loading or transportation;					
		 the works should cause no visible foam, oil, grease, scum, litter or other objectionable matter to be present on the water within the site or dumping grounds; 	TDD's Contractor	Whole reclamation area During reclamation works End of reclamation works	Implemented during Construction Stage	R	7
		 bulk filling should be carried out, where feasible, behind completed seawall to above high water mark. In general and where physically practical, filling should not be carried out without the seawall having been substantially completed for a distance of 100m – 200m ahead of filling; and fill materials should comply with technical specification requirements and be taken from approved sources only. The maximum fines content of marine sand should be limited to 5% as assumed in the water quality assessments. transport of contaminated mud (or filling material) to the marine disposal site (or works site) should, wherever possible, be by split barge of not less than 750 m³ capacity, well maintained and capable of rapid opening and discharge at the disposal site; the dredged material should be disposed in the pit by bottom dumping, at a location within the pit specified by the MFC; discharge should be undertaken rapidly and the hoppers should then immediately be closed. Material adhering to the sides of the hopper should not be washed out of the hopper and the hopper should remain closed until the barge next return to the disposal 					
		site; the dumping vessel is not required to station but will be guided by the site staff managing the disposal facility. The vessel crew should be familiar with such operational procedures; monitoring of the barge loading to ensure that loss of material does not take place during transportation; and Transport barges or vessels shall be equipped with automatic self-monitoring devices.					



lam	
COLLEGE	Lam Geotechnics Limited

No.	Activity	Mitigation/EIA Recommendations	Responsibility for Implementation	Location Duration completion of measures	Implementation Status	Permit Conditions apply to	Relevant Guidelines Legislation
		Specific Measures Associated with Dredging and Filling Works when CRIII Dredging and Filling Works are being constructed concurrently with WDII Dredging and Filling Works					
		 deployment of silt curtains around the dredging and fill release points to contain SS within the construction site during dredging and filling; deployment of silt screens at the cooling water intakes and WSD salt water intakes to further minimise the intake of SS within the sea water. 	TDD's Contractor	Reclamation Areas as appropriate When CRIII and WDII - Dredging and Filling Works occur concurrently End of Concurrent Works	Implemented during Construction Stage	R	-
		Specific Measures Associated with Floating Debris The result of the floating debris simulation has shown that the intermediate layout of the proposed reclamation has potential to trap floating rubbish. Monitoring and control of the construction activities should be taken to prevent the release of construction waste and rubbish from the construction site. Collection of floating debris should be carried out at least once every day by the CRIII Contractor, and more frequently (two or three times per day) at the water body south of the Initial Reclamation Area West and near the cooling water intakes where large substances could block the screens and filter pipes of the intakes and reduce their efficiency. Debris should be collected and taken to landfill sites for disposal.	TDD's Contractor	Whole reclamation area During construction At end of construction	Implemented during Construction Stage	R	-
		Specific Measures for Dealing with Culvert L Outfall at Completion of CRIII Eastern Seawall As a mitigation measure, to avoid the accumulation of water borne pollutants within a temporary embayment to the east of CRIII, an impermeable barrier, suspended from a floating boom on the water surface and extending down to the seabed, will be erected by the CRIII Contractor on completion of the CRIII eastern seawall. The barrier will channel the stormwater discharge flows from Culvert L to the outside of the embayment. The CRIII Contractor will maintain this barrier until the WDII Contractor takes possession of this site, whereupon the WDII Contractor will takeover the maintenance of this barrier until the reclamation works in this area are carried out and the new Culvert L extension is constructed.	TDD's Consultant	Culvert L Outfall During Construction To handover to WDII Contractor	Implemented during Construction Stage	R	



No.	Activity	Mitigation/EIA Recommendations	Responsibility for Implementation	Location Duration completion of measures	Implementation Status	Permit Conditions apply to	Relevant Guidelines Legislation
		Construction Run-off and Drainage					
		 Control of Site Surface Runoff: Surface run-off from construction sites should be discharged into storm drains via adequately designed sand/silt removal facilities such as sand traps, silt traps and sediment basins. Channels or earth bunds or sand bag barriers should be provided on site to properly direct stormwater to such silt removal facilities. Perimeter channels at site boundaries should be provided where necessary. Catchpits and perimeter channels should be constructed in advance of site formation works and earthworks. Silt removal facilities, channels and manholes should be maintained. Construction works should be programmed to minimise soil excavation works in rainy seasons (April to September). If excavation in soil cannot be avoided, temporarily exposed slope surfaces should be covered and temporary access roads should be protected by crushed stone or gravel, as excavation proceeds. Intercepting channels should be provided. Earthworks final surfaces should be well compacted and the subsequent permanent work or surface protection should be carried out immediately after the final surfaces are formed to prevent erosion caused by rainstorms. Appropriate drainage such as intercepting channels should be provided where necessary. Measures should be taken to minimise the ingress of rainwater into trenches. If excavation of trenches in wet seasons is necessary, they should be dug and backfilled in 	TDD's Contractor	Works Area During construction End of construction	Implemented during Construction Stage	P,R,A,C	7
		short sections. Rainwater pumped out from trenches or foundation excavations should be discharged into storm drains via silt removal facilities. - Open stockpiles of construction materials should be covered. - Manholes should be adequately covered and temporarily sealed.					
		Groundwater Groundwater pumped out of tunnels or caverns should be discharged into storm drains after the removal of silt.					



No.	Activity	Mitigation/EIA Recommendations	Responsibility for Implementation	Location Duration completion of measures	Implementation Status	Permit Conditions apply to	Relevant Guidelines Legislation
		 Boring and Drilling Water Water used in ground boring and drilling for site investigation or rock/soil anchoring should as far as practicable be recirculated after sedimentation. Wastewater should be discharged into storm drains via silt removal facilities. Wastewater from Concrete Batching and Precast Concrete Casting Wastewater generated from the washing down of mixer trucks and drum mixers and similar equipment should wherever practicable be recycled. The discharge of wastewater should be kept to a minimum. To prevent pollution from wastewater overflow, the pump sump of any water recycling system should be provided with an on-line standby pump of adequate capacity and with automatic alternating devices. Under normal circumstances, surplus wastewater may be discharged into foul sewers after treatment in silt removal and pH adjustment facilities (to within the pH range of 6 to 10). Disposal of wastewater into storm drains will require more elaborate treatment. Surface run-off should be segregated from the concrete mixing and casting yard area as much as possible, and diverted to the stormwater drainage system. Surface run-off contaminated by materials in a concrete mixing area or casting yard should be adequately treated before disposal into stormwater drains. 	TDD's Contractor	Work Area During construction End of construction	Implemented during Construction Stage	P,R,A,C	7
		Wheel Washing Water All vehicles and plant should be cleaned before they leave the construction site. A wheel washing bay should be provided at every site exit if practicable and wash-water should have sand and silt settled out or removed before discharging into storm drains. The section of construction road between the wheel washing bay and the public road should be paved with backfall to reduce vehicle tracking of soil and to prevent site run-off from entering public road drains. Bentonite Slurries Bentonite slurries should be reconditioned and reused wherever practicable. If the disposal of a certain residual quantity cannot be avoided, the used slurry may be disposed of at the marine spoil site subject to obtaining a marine dumping licence from EPD (on a case-by-case basis). If the used bentonite slurry is intended to be disposed of through the public drainage	TDD's Contractor	Work Area During construction End of construction	Implemented during Construction Stage	P,R,A,C	7



No.	Activity	Mitigation/EIA Recommendations	Responsibility for Implementation	Location Duration completion of measures	Implementation Status	Permit Conditions apply to	Relevant Guidelines Legislation
		system, it should be treated to the respective effluent standards applicable to foul sewers, storm drains or the receiving waters as set out in the WPCO Technical Memorandum on Effluent Standards.					
		Wastewater from Building Construction Before commencing any demolition works, all sewer and drainage connections should be sealed to prevent building debris, soil, sand etc. from entering public sewers/drains. Wastewater generated from building construction activities including concreting, plastering, internal decoration, cleaning of works and similar activities should not be discharged into the stormwater drainage system. If the wastewater is to be discharged into foul sewers, it should undergo the removal of settleable solids in a silt removal facility, and pH adjustment as necessary.					
		-Licensing of Construction Site Discharges within Water Control Zones -All discharges into any drainage or sewerage systems, or inland or coastal waters, or into the ground (e.g. from septic tanks) within a Water Control Zone are controlled under the Water Pollution control Ordinance (WPCO), except the discharge of domestic sewage into foul sewers or the discharge of unpolluted water into storm drains or into the waters of Hong Kong. Construction site discharges are controlled under the WPCODischarges controlled under the WPCO must comply with the terms and conditions of a valid WPCO licence.					



No.	Activity	Mitigation/EIA Recommendations	Responsibility for Implementation	Location Duration completion of measures	Implementation Status	Permit Conditions apply to	Relevant Guidelines Legislation
8.	Construction Waste Control Requirements	Specific Measures Associated with Marine sediments					
		In accordance with the WBTC No. 3/2000, the seriously contaminated material must be dredged and transported with great care. Mitigation measures, includeding the use of close-grab dredgers, shall be incorporated. The dredged contaminated sediment must be effectively isolated from the environment upon final disposal and shall be disposed of at the East Sha Chau Contaminated Mud Pits.	TDD's Contractor	Whole Reclamation Area During Reclamation Works End of Reclamation Work	Implemented during Construction Stage	R	7
		Segregation and Disposal of Wastes inert demolition/construction waste material when deemed suitable for reclamation or land formation should be re-used on-site; non-inert demolition / construction waste material should be disposed of at landfills; chemical waste as defined by Schedule 1 of the Waste Disposal (Chemical Waste) (General) Regulation, should be stored in accordance with approved methods defined in the Regulation and Code of Practice and the chemical waste disposed of at the Chemical Waste Treatment Facility located at Tsing Yi or an approved recycler; general refuse should be recycled where possible or disposed of at public landfill.	TDD's Contractor	Works Areas During Construction End of Construction	Implemented during Construction Stage	P, R, A, C	1,8, 9
		Storage, Collection and Transport of Waste wastes should be handled and stored in a manner which ensures that they are held securely without loss or leakage thereby minimising the potential for pollution. Release of these potential pollutants into marine waters during storage, handling or barge transportation should not be permitted as introduction of polluted waters is likely to have detrimental effects on water quality and water sensitive receivers; only reputable waste hauliers authorised to collect the specific category of waste concerned should be employed; appropriate measures should be employed to minimise windblown litter and dust during transportation by using enclosed bins, covering trucks or transporting wastes in enclosed containers; the necessary waste disposal permits and registrations should be obtained from the appropriate authorities, if they are required, in accordance with the Waste Disposal Ordinance (Cap 354), Waste Disposal (Chemical Waste) (General) Regulation (Cap 354)	TDD's Contractor	Works Areas During Construction End of Construction	Implemented during Construction Stage	P, R, A, C	1, 8, 9



No.	Activity	Mitigation/EIA Recommendations	Responsibility for Implementation	Location Duration completion of measures	Implementation Status	Permit Conditions apply to	Relevant Guidelines Legislation
9	Construction Landscape and	and the Crown Land Ordinance; collection of general refuse should be carried out frequently, preferably daily; waste should only be disposed of at licensed sites and the civil engineering contractor should develop procedures to ensure that illegal disposal of wastes does not occur; waste storage areas should be well maintained and cleaned regularly; records should be maintained of the quantities of wastes generated, recycled and disposed, determined by weighing each load or other method; and A "trip ticket" system should be implemented, if required by Government. Construction stage landscape and visual mitigation measures should include: Minimising contractors accesses and working areas as far as possible;	TDD's design consultant	Area wide during design and contract preparation	Implemented during Design	P, R, A, C	11, 12, 13,14
	Visual Control Requirements	 Protection and retention of existing vegetation where possible in accordance with the Hong Kong Government "A Guide to Tree Planting and Maintenance in Urban Hong Kong, Section 5" Care of Trees on Development Sites' and the Country Parks Ordinance Transplanting of trees where appropriate; Advance planting and visual screening; Conservation of top soil; Design of the temporary works areas so as to optimise eventual use as promenade and public open space; and Sensitively designed site hoarding. 			Stage		
10	Monitoring and Audit	To be carried out in accordance with the Schedule in the EM and A Manual	TDD*/Contractor/ RSS TDD's design consultant	Works areas During construction End of construction and within one year of operational phase Area wide during design and contract preparation	Implemented during Construction Stage Implemented during Design Stage	P, R, A, C	1 11,12,13,14



Relevant Guidelines Legislation

- 1. Environmental Impact Assessment Ordinance Technical Memorandum (EIAO)
- 2. HKPSG
- 3. ExCo Criteria for ITR
- 4. Noise Control Ordinance
- 5. The ProPECC Note PN2/93 (Construction Noise daytime limits)
- 6. Air Pollution Control Ordinance (APCO)
- 7. Water Pollution Control Ordinance (WPCO)(Cap. 358)
- 8. Waste Disposal Ordinance (Cap 354)
- 9. Waste Disposal (Chemical Waste)(General) Regulation (Cap 354)
- 10. Land Ordinance (Cap 28)
- 11. WBTC 25/92 Allocation of Space for Urban Trees
- 12. WBTC 25/93 Control of Visual Impact of Slopes
- 13. WBTC 18/94 Management and Maintenance of both Natural Vegetation and Landscape Works
- 14. WBTC 24/94 and PELBTC 3/94 "Tree Preservation"
- 15. Antiquities and Monuments Ordinance (Cap 53)

Permit Conditions apply to

- P Primary and District Distributor Roads
- R Reclamation
- A North Island Line Protection Works
- C Central and Wanchai Bypass
- + These items should be excluded from any Environmental Permit conditions as these refer to future development of the area (which is not designated under the EIAO), and are not related to reclamation and dredging activities which are designated, and can hence be controlled through EP conditions.
- * Normally undertaken by a specialist monitoring team employed directly by the proponent and audited by the Environmental Works Checker.

Appendix 3.1

Action and Limit Level

Action and Limit Level

Action and Limit Level for Noise Monitoring

Time Period	Action Level	Limit Level
07:00 - 19:00 hours on normal weekdays	When one documented complaint is received.	70 dB(A)

Action and Limit Level for Air Monitoring

Monitoring Locations	1-hour TSP Le	vel inµg/m3	24-hour TSP Level inµg/m3		
	Action Level	Limit Level	Action Level	Limit Level	
ACL1 - City Hall	460	500	163	260	
ACL2a - Contractor HK/2012/08 Site Office	300.1	500	187.3	260	

Action and Limit Level for Water Quality Monitoring

Parameters	Action Level	Limit Level					
M5B – Central Cooling Water Intake Group							
SS in mg/L	12.00	17.00					
DO in mg/L	4.60	3.00					

Appendix 5.1

Event Action Plans

Central Reclamation Phase III: Environmental Monitoring and Audit - Event and Action Plan for Air and Noise Quality

Event and Action Plan for Air Quality								
Event	Action							
	ET Leader	IC(E)	ER	Contractor				
Action Level - Exceedance for one sample	Identify source Inform IC(E) and ER Repeat measurement to confirm finding Increase monitoring frequency to daily	Check monitoring data submitted by ET Check Contractor's working method	Notify Contractor	Rectify any unacceptable practice Amend working methods if appropriate				
Action Level - Exceedance for two or more consecutive samples	Identify source Inform IC(E) and ER Repeat measurement to confirm finding Increase monitoring frequency to daily Discuss with IC(E) and Contractor on remedial actions If exceedance continues, arrange meeting with IC(E) and ER If exceedance stops cease additional monitoring	Check monitoring data submitted by ET Check Contractor's working method Discuss with ET and Contractor on possible remedial measures Advise the ER on the effectiveness of the proposed remedial measures Supervise the implementation of remedial measures	Confirm receipt of notification of failure in writing Notify Contractor Ensure remedial measures properly implemented	Submit proposals for remedial actions to IC(E) within 3 working days of notification Implement the agreed proposals Amend proposal if appropriate				
Limit Level - Exceedance for one sample	Identify source Inform ER and EPD Repeat measurement to confirm findings Increase monitoring frequency to daily Assess effectiveness of Contractor's remedial actions and keep IC(E), EPD and ER informed of the results	Check monitoring data submitted by ET Check Contractor's working method Discuss with ET and Contractor on possible remedial measures Advise the ER on the effectiveness of the proposed remedial measures Supervise the implementation of remedial measures	Confirm receipt of notification of failure in writing Notify Contractor Ensure remedial measures properly implemented	Take immediate action to avoid further exceedance Submit proposal for remedial actions to IC(E) within 3 working days of notification Implement the agreed measures				
Limit Level - Exceedance for two or more consecutive samples	Notify IC(E), ER, Contractor and EPD Identify source Repeat measurements to confirm findings Increase monitoring frequency to daily Carry out analysis of Contractor's working procedures to determine possible mitigation to be implemented Arrange meeting with IC(E) and ER to discuss the remedial actions to be taken Assess effectiveness of Contractor's remedial actions and keep IC(E), EPD and ER informed of the results If exceedance stops, cease additional monitoring	Discuss amongst ER, ET, and Contractor on the potential remedial actions Review Contractor's remedial actions whenever necessary to assure their effectiveness and advise the ER accordingly Supervise the implementation of remedial measures	Confirm receipt of notification of failure in writing Notify Contractor In consultation with the IC(E), agree with the Contractor on the remedial measures to be implemented Ensure remedial measures properly implemented If exceedance continues, consider what portion of the work is responsible and instruct the Contractor to stop that portion of work until the exceedance is abated	Take immediate action to avoid further exceedance Submit proposals for remedial actions to IC(E) within 3 working days of notification Implement the agreed proposals Resubmit proposals if problem still not under control Stop the relevant portion of works as determined by the ER until the exceedance is abated				

Central Reclamation Phase III: Environmental Monitoring and Audit - Event and Action Plan for Air and Noise Quality

Event and Action Plan for Noise Quality							
Event	Action						
	ET Leader	IC(E)	ER	Contractor			
Action Level is reached	Notify IC(E) and Contractor Carry out investigation Report the results of the investigation to the IC(E) and Contractor Discuss with the Contractor and formulate remedial measures	Discuss amongst ER, ET and Contractor on the potential remedial actions Review Contractor's remedial actions whenever necessary to assure their effectiveness and advise the ER accordingly Supervise the implementation of remedial measures	Confirm receipt of notification of failure in writing Notify Contractor Require Contractor to propose remedial measures for the analyzed noise problem Ensure remedial measures are properly implemented	Submit noise mitigation proposal to IC(E Implement noise mitigation proposals			
Limit Level is reached	Notify IC(E), ER, EPD and Contractor Identify source Repeat measurement to confirm findings Carry out analysis of Contractor's working procedures to determine possible mitigation to be implemented Inform IC(E), ER and EPD the causes & actions taken for the exceedances Assess effectiveness of Contractor's remedial actions and keep IC(E), EPD and ER informed of the results If exceedance stops cease additional monitoring	Discuss amongst ER, ET and Contractor on the potential remedial actions Review Contractor's remedial actions whenever necessary to assure their effectiveness and advise the ER accordingly Supervise the implementation of remedial measures	Confirm receipt of notification of failure in writing Notify Contractor Require Contractor to propose remedial measures for the analyzed noise problem Ensure remedial measures are properly implemented If exceedance continues, consider what portion of the work is responsible and instruct the Contractor to stop that portion or work until the exceedance is abated	Take immediate action to avoid further exceedance Submit proposals for remedial actions to IC(E) within 3 working days of notification Implement the agreed proposals Resubmit proposals if problem still not under control Stop the relevant portion of works as determined by the ER until the exceedance is abated			

Central Reclamation Phase III: Environmental Monitoring and Audit - Event and Action Plan for Water Quality

EVENT	ACTION							
	ET	IEC	ER	CONTRACTOR				
Action level being exceeded by one sampling day	Repeat in-situ measurement to confirm findings; Identify source(s) of impact; Inform IEC and Contractor; Check monitoring data, all plant, equipment and Contractor's working methods; Discuss mitigation measures with IEC and Contractor; (The above actions should be taken within 1 working day after the exceedance is identified) Repeat measurement on next day of exceedance.	Discuss with ET and Contractor on the mitigation measures; Review proposals on mitigation measures submitted by Contractor and advise the ER accordingly; Assess the effectiveness of the implemented mitigation measures. (The above actions should be taken within 1 working day after the exceedance is identified)	Discuss with IEC on the proposed mitigation measures; Make agreement on the mitigation measures to be implemented. (The above actions should be taken within 1 working day after the exceedance is identified)	Inform the ER and confirm notification of the non-compliance in writing; Rectify unacceptable practice; Check all plant and equipment; Consider changes of working methods; Discuss with ET and IEC and propose mitigation measures to IEC and ER; Implement the agreed mitigation measures. (The above actions should be taken within 1 working day after the exceedance is identified)				
Action level being exceeded by more than one consecutive sampling days	Identify source(s) of impact; Inform IEC and Contractor; Check monitoring data, all plant, equipment and Contractor's working methods; Discuss mitigation measures with IEC and Contractor; Ensure mitigation measures are implemented; Prepare to increase the monitoring frequency to daily; (The above actions should be taken within 1 working day after the exceedance is identified) Repeat measurement on next working day of exceedance.	Discuss with ET and Contractor on the mitigation measures; Review proposals on mitigation measures submitted by Contractor and advise the ER accordingly; Assess the effectiveness of the implemented mitigation measures. (The above actions should be taken within 1 working day after the exceedance is identified)	Discuss with IEC on the proposed mitigation measures; Make agreement on the mitigation measures to be implemented; Assess the effectiveness of the implemented mitigation measures. (The above actions should be taken within 1 working day after the exceedance is identified)	Inform the Engineer and confirm notification of the non-compliance in writing; Rectify unacceptable practice; Check all plant and equipment; Consider changes of working methods; Discuss with ET and IEC and propose mitigation measures to IEC and ER within 3 working days; Implement the agreed mitigation measures. (The above actions should be taken within 1 working day after the exceedance is identified)				

I	: Environmental Monitoring and			
Event			tion	0.00400.0400
	ET	IEC	ER	Contractor
Limit level being exceeded by one sampling day	Repeat in-situ measurement to confirm findings; Identify source(s) of impact; Inform IEC, contractor and EPD; Check monitoring data, all plant, equipment and Contractor's working methods; Discuss mitigation measures with IEC, ER and Contractor; Ensure mitigation measures are implemented; Increase the monitoring frequency to daily until no exceedance of Limit level. (The above actions should be taken within 1 working day after the exceedance is identified)	Discuss with ET and Contractor on the mitigation measures; Review proposals on mitigation measures submitted by Contractor and advise the ER accordingly; Assess the effectiveness of the implemented mitigation measures. (The above actions should be taken within 1 working day after the exceedance is identified)	Discuss with IEC, ET and Contractor on the proposed mitigation measures; Request Contractor to critically review the working methods; Make agreement on the mitigation measures to be implemented; Assess the effectiveness of the implemented mitigation measures. (The above actions should be taken within 1 working day after the exceedance is identified)	Inform the Engineer and confirm notification of the non-compliance in writing; Rectify unacceptable practice; Check all plant and equipment; Consider changes of working methods; Discuss with ET, IEC and ER and propose mitigation measures to IEC and ER within 3 working days; Implement the agreed mitigation measures. (The above actions should be taken within 1 working day after the exceedance is identified)
Limit level being exceeded by more than one consecutive sampling days	Identify source(s) of impact; Inform IEC, contractor and EPD; Check monitoring data, all plant, equipment and Contractor's working methods; Discuss mitigation measures with IEC, ER and Contractor; Ensure mitigation measures are implemented; Increase the monitoring frequency to daily until no exceedance of Limit level for two consecutive days. (The above actions should be taken within 1 working day after the exceedance is identified)	Discuss with ET and Contractor on the mitigation measures; Review proposals on mitigation measures submitted by Contractor and advise the ER accordingly; Assess the effectiveness of the implemented mitigation measures. (The above actions should be taken within 1 working day after the exceedance is identified)	Discuss with IEC, ET and Contractor on the proposed mitigation measures; Request Contractor to critically review the working methods; Make agreement on the mitigation measures to be implemented; Assess the effectiveness of the implemented mitigation measures; Consider and instruct, if necessary, the Contractor to slow down or to stop all or part of the marine work until no exceedance of Limit level. (The above actions should be taken within 1 working day after the exceedance is identified)	Inform the ER and confirm notification of the non-compliance in writing; Rectify unacceptable practice; Check all plant and equipment; Consider changes of working methods; Discuss with ET, IEC and ER and propose mitigation measures to IEC and ER within 3working days; Implement the agreed mitigation measures; As directed by the Engineer, to slow down or to stop all or part of the marine work or construction activities. (The above actions should be taken within 1 working day after the exceedance is identified)

Appendix 6.1

Complaint Log

Environmental Complaints Log

Complaint Log No.	Date of Complaint	Received From and Received By	Location of Complainant	Nature of Complaint	Outcome	Status
150211	21/1/2015	EPD complaint (EPD Ref.: H04/RS/000171 6-15) received by ET on 11 February 2015	Construction site opposite to CITIC Tower	Construction dust was emitted from a construction site opposite to CITIC Tower	According to the relevant site records, trench grabbing for D-wall construction and socket H-pile construction were conducted at the concerned location on 21 January 2015. Dust screen for socket H-pile construction, maintenance of site haul road in wet condition and water spraying at vehicle entrance/exit points of HK/2012/08 Contractor site office and Portion I were implemented by the Contractor of HK/2012/08 near the concerned location on 21 January 2015.	Closed
					In addition, no environmental deficiency related to dust	
					mitigation was identified at the concerned location during	
					weekly environmental inspections conducted on 27 Jan, 3 and 10 Feb 2015 and dust mitigation measures including water spraying for dusty haul road and provision of wheel washing were in place and no dust related impact from the construction works at the concerned location was observed.	
					Meanwhile, the Air Quality Health Index (AQHI) recorded by EPD across Western District and Eastern District on 21 January 2015 was ranged from 4 to 10+ indicating a severely high concentration of ambient air pollutants.	
					Based on reviewing relevant impact monitoring data,	
				elevated TSP were recorded at monitoring stations across Central to Wan Chai West area despite a non-Project related exceedance was recorded at nearby monitoring station ACL2a (Contractor HK/2012/08 Site Office) on 21 January 2015 and was considered to be contributed by ambient air pollutant.		
					The site condition under Contract HK/2012/08 at the concerned location was considered to be generally satisfactory and no non-conformity related to cumulative air quality impact was observed at the concerned location.	
					Nevertheless, in view of the public concern, the contractor was reminded to enhance the dust mitigation measures implemented to minimize potential nuisance to nearby public.	

Complaint Log No.	Date of Complaint	Received From and Received By	Location of Complainant	Nature of Complaint	Outcome	Status
150703	3/7/2015	EPD complaint (EPD Ref.: H05/RS/000162 15-15) received by ET on 03 July 2015	West of HKCEC outside Lung King Street	Dark smoke was observed from a derrick barge in yellow color for reclamation work at location to the west of HKCEC outside Lung King Street	According to the relevant site records under Contract HK/2012/08, one derrick barge (Chang Sheng 306) in yellow color was conducting material transfer at a near shore location opposite to Fleet Arcade on 30 June 2015 around noon-time under HK/2012/08 and the concerned derrick barge was towed away for maintenance on the same date.	Closed
					Follow-up inspection was conducted during weekly environmental inspection on 7 July 2015, no dark smoke was observed from the concerned derrick barge (Chang Sheng 306). Nevertheless, the Contractor was reminded to conduct regular checking on the condition of the all derrick barges deployed on site to ensure only well maintained equipment are used to avoid potential dark smoke emission affecting nearby public.	
					Based on the review on relevant record and follow up site inspection, the condition of the concerned derrick barge was considered generally in order and no dark smoke was observed. In view of the public concern, the Contractor was reminded to conduct regular checking on the condition of derrick barges deployed on site to ensure only well maintained equipment are used on site to avoid potential dark smoke emission affecting nearby public.	

Complaint Log No.	Date of Complaint	Received From and Received By	Location of Complainant	Nature of Complaint	Outcome	Status
150917	17/9/2015	A public complaint regarding water quality referred by EPD was received by ET on 17 September 2015	Central and Wan Chai Reclamation coastline (between LUNG WUI ROAD to LUNG WO ROAD, Central & Wan Chai, Hong Kong)	Silt from Central and Wan Chai Reclamation was spotted along the coastline (between LUNG WUI ROAD to LUNG WO ROAD, Central & Wan Chai, Hong Kong)	Based on the site records confirmed by RSS, removal of seawall blocks by derrick barge was undertaken by Contract HK/2012/08 at Central Reclamation Phase III works area while mitigation measures including provision of silt curtain implemented by the Contractor of HK/2012/08 during the seawall block removal works. According to relevant record, muddy dispersion at HKCEC2W (area opposite to Lung King Street) was observed by the Environmental Team on 14 September 2015 afternoon. The muddy patch was observed dispersing outside the outer layer silt curtain deployed by the Contractor of HK/2012/08 towards the Central Reclamation Phase III area while the outer layer silt curtain was observed partially opened. In view of the above observations, the Contractor was advised to rectify any environmental deficiencies such that adequate protection such as silt curtain shall be provided for exposed soil slope to mitigate for potential runoff related water quality impact to the surrounding waters; outer layer silt curtain deployed shall be entirely closed during works to safeguard the surrounding water quality. Any opening for marine vessel shall be closed promptly after passage and localized silt curtain deployed on site shall be properly maintained to avoid any gap or opening to	Closed

Complaint Log No.	Date of Complaint	Received From and Received By	Location of Complainant	Nature of Complaint	Outcome	Status
160804	4/8/2016	A public complaint referred by EPD was received by ET on 04 August 2016 (Case Ref.: H05/RS/0001 9364-16).	Temporary Barging Facility outside Lung Wo Road	Muddy water discharge was found at the temporary barging facility outside Lung Wo Road on 03 August 2016.	Based on the site records confirmed by RSS, the concerned temporary barging facility outside Lung Wo Road was maintained and operated by non- WDII Project and no construction activity was conducted by the Contractor of HK/2012/08 at the location around the concerned temporary barging facility on 03 August 2016. Nevertheless, in view of the public concern, the Contractor of HK/2012/08 was reminded to maintain the bunding along site boundary for protection against potential surface runoff and maintain proper site drainage collection of construction effluent to avoid any potential water quality concern.	The interim investigation report was submitted to EPD on 12 August 2016.

Appendix 8.1

Construction Programme of Individual Contracts

	14.88.9								Centr	Wan	Chai	Devel	No. H opmer pass a	nt Ph	ase II	i Wes	t							Pa	ge:1/7		
tivity ID	Activity Name	Remaining Dur	Early Start	Early Finish	Activity % Complete	Jan	Feb	Mar	Apr	May	Jun 2	Jul	Aug	Sep	Oct	Nov	Dec	Jan	Feb	Mar	Apr	May	2019 Jun	Jul	Aug	Sep	Oct /
	Revised Works Programme Rev.12.0(DD 20 No	ovember 20	017)																			,	Jun	oui	Aug	Зер	Oct P
	nd Milestone Dates Vorks Completion (Included Not Granted EOT Enti																										
KD10840	Completion of Section IIIA	trement of 1	ne Contracto		201																						
KD10860	Complection of Section IV	0		08-Sep-18*	0%									•													
KD10880	Completion of Section V	0		30-Aug-18* 26-Sep-18*	0%																						
KD11010	Completion of Section VII	0			0%									_													
KD11020	Completion of Section VIII	0		14-Sep-18* 21-Sep-18*	0%									·_										•			
KD11040	Completion of Section IX	0		21-Sep-19*	0%									•													
KD11060	Completion of Section X	0		21-Sep-19*	0%									_												•	
	tions of Works Completion			21 Sep 16	0 70				ļ					•													
KD10080	Planned Section IIIA Completion - Road A2,A4, A5	0		08-Sep-18	0%									_													
KD10100	Planned Section IV Completion - Slip Road 3	0		30-Aug-18	0%									Ť													
KD10140	Planned Section V Completion - Remaining At-Grade Road	0		26-Sep-18	0%									_													
KD10280	Planned Section VII Completion - Remainder Works	0		14-Sep-18	0%																						
KD10300	Planned Section VIII Completion - Landscape Softwork	0		21-Sep-18	0%																						
KD10320	Planned Section IX Completion - Establishment Works	0		21-Sep-19	0%																						
KD10340	Planned Section X Completion - Tree Protection & Preservation	0		21-Sep-18	0%									•												•	
Dredging and	d Reclamation																										
Marine Work	Construction																										
Zone CRIII																											
Seawall Cons	truction - Zone CRIII																										
	eawall- 2nd Stage																										
Seawalf 2 &																											
MAR21371	Zone CRIII - seawall 2 & 12 - Backfilling remaining portion (type A, geotextile and filter)	0	19-Jan-18 A	27-Jan-18 A	100%																						
Zone D																											
	truction - Zone D																										
Seawall 10 &																											
MAR20630	Zone D - Seawall 10 & 11: Install remaining seawall block	14	20-Feb-18*	05-Mar-18	0%																						
MAR20650	Zone D - Seawall 10 & 11: Backfill Type A	7	06-Mar-18	12-Mar-18	0%																						
MAR20670	Zone D - Seawall 10 & 11: Lay geotextile and filter	7	13-Mar-18	19-Mar-18	0%																						
	ction Completion																										
Construction																											
	Road A2, A4 & A5																										
NOGUWOFK &	Utilities - Section 1 (L1806 - L1801)																										
ata Date: 0-Feb-18	Current Milestone Actual Work Critical Remaining Work Remaining Work Remaining Level of Effort				Up (Ref	dated to R	d Wo	orks I 2 as	Progr of 20	amm Febr	ne Re urary	v.12 2018	3)						Dat 20-Feb		Revision 2	Chec	cked		Approv	ed	


Page: 2/7

vity ID	Activity Name	Remaining Dur	Early Start	Early Finish	Activity %							2018											2019	63213			
SIIIA10279c	Sec III A - section 1 carriageway - sewerage pipe from M/H	0	02-Jan-18 A	03-Feb-18 A	Complete 100%	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	
SIIIA10279C	8C to F8B (night time): construct sewerage pipe Sec III A - section 1 carriageway - sewerage pipe Sec III A - section 1 carriageway - sewerage pipe from M/H	6	05-Feb-18 A																								
	F8B - F8A (night time)	0		26-Feb-18	0%																						
SIIIA10294	Sec III A - section 1 carriageway - sewerage pipe from M/H F8A - F8	8	17-Jan-18 A	28-Feb-18	27.27%	100000																					
SIIIA10295	Sec III A - carriageway - works prrior TTA stage 5: excavation and duct laying of TCSS and public lighting	7	18-Jan-18 A	27-Feb-18	0%																						
SIIIA10298	Sec III A - section 1 carriageway - works prrior TTA stage 5: road kerb	5	28-Feb-18	05-Mar-18	0%																						
SIIIA10301	Sec III A - section 1 carriageway - works prrior TTA stage 5: road formation	2	06-Mar-18	07-Mar-18	0%			1		-																	
SIIIA10302	Sec III A - section 1 carriageway - works prrior TTA stage	5	08-Mar-18	13-Mar-18	0%			•																			
SIIIA10303	5: laying asphalt Sec III A - section 1 carriageway - works prrior TTA stage	3	14-Mar-18	16-Mar-18	0%																						
SIIIA10310	5: road marking & preparation works Sec III A - section 1 carriageway - TTA stage 5:	1	17-Mar-18	17-Mar-18	0%			1																			
SIIIA10310a	Implementation of TTA Stage 5 Sec III A - section 1 carriageway - TTA stage 5: remaining	12	19-Mar-18	04-Apr-18	0%				-																		
SIIIA10310b	sewerage pipe for M/H F8A - M/H F8 Sec III A - section 1 carriageway - TTA stage 5: remaining	18	06-Apr-18	26-Apr-18	0%									·		-					ļ			ļ			
SIIIA10310c	sewerage pipe for M/H F8A - M/H F8B Sec III A - section 1 carriageway - TTA stage 5: SR1	5	19-Mar-18	23-Mar-18	0%																						
SIIIA10310d	at-grade road- remove sheetpile at U-trough west	21	24-Mar-18	21-Apr-18	0%																				; ; ;		
	at-grade road -remove temp. road access bay 5 of SR1																										
SIIIA10310e	at-grade road -construct upstand wall above Dwall	25	23-Apr-18	23-May-18	0%																						
SIIIA10310f	Sec III A - section 1 carriageway - TTA stage 5: SR1 at-grade road - roadside barrier	14	24-May-18	08-Jun-18	0%																						
SIIIA10310g	Sec III A - section 1 carriageway - TTA stage 5: SR1 at-grade road - road formation	7	09-Jun-18	16-Jun-18	0%						-																
SIIIA10310h	Sec III A - section 1 carriageway - TTA stage 5: SR1 at-grade road - laying asphalt with transition slab	14	19-Jun-18	05-Jul-18	0%																						
SIIIA10312	Sec III A - roadwork and utilities section 1 carriageway - Drainage works (L2202 - L2201)	15	19-Mar-18	09-Apr-18	0%																						
SIIIA10312a	Sec III A - roadwork and utilities section 1 carriageway - Drainage works (L1805 - L1801)	15	10-Apr-18	26-Apr-18	0%																						
SIIIA10312b	Sec III A - roadwork and utilities section 1 carriageway - Drainage works (L1805-1807)	12	27-Apr-18	11-May-18	0%																						
SIIIA10313	Sec III A - roadwork and utilities section 1 carriageway - gully pipe (L1807 - L1801)	14	07-May-18	23-May-18	0%										†												
SIIIA10320	Sec III A - roadwork and utilities section 1 carriageway -	7	24-May-18	31-May-18	0%					-																	
SIIIA10340	fresh watermain Sec III A - roadwork and utilities section 1 carriageway -	14	01-Jun-18	16-Jun-18	0%																						
SIIIA10360	utilities: HEC (80m) along carriageway Sec III A - roadwork and utilities section 1 carriageway -	14	19-Jun-18	05-Jul-18	0%																						
SIIIA10400	road kerb & formation Sec III A - roadwork and utilities section 1 carriageway -	7	06-Jul-18	13-Jul-18	0%																						
SIIIA10420	black top Sec III A - Implementation of TTA Stage 7P (Closure of	1	14-Jul-18	14-Jul-18	0%					ļ																	
SIIIA10440	U-turn at Expo Drive) Sec III A - roadwork and utilities section 1 carriageway :	10	16-Jul-18	26-Jul-18	0%																						
SIIIA10460	breaking existing asphalt																										
	Sec III A - roadwork and utilities section 1 carriageway: road kerb and formation	14	27-Jul-18	11-Aug-18	0%																						
SIIIA10480	Sec III A - roadwork and utilities section 1 carriageway : black top	10	13-Aug-18	23-Aug-18	0%																						
SIIIA10500	Sec III A - roadwork and utilities section 1 carriageway : roadmarking and road furniture	14	24-Aug-18	08-Sep-18	0%																						
Roadwork &	Utilities - Section 2 (L1810 - L1807)																										
SIIIA12590	Sec III A - roadwork and utilities section 2 carriageway - black top	0	20-Jan-18 A	27-Jan-18 A	100%																						
Roadwork &	Utilities - Section 3 (L1808 - L1102)																										
SIIIA12770	Sec III A - roadwork and utilities section 3 carriageway - utilities: HEC ducting (60m) & crossroad duct (PCCW & HGC)	0	20-Jan-18 A	07-Feb-18 A	100%																						
SIIIA12790	Sec III A - roadwork and utilities section 3 carriageway -	17	08-Feb-18 A	10-Mar-18	0%		-	-																			
SIIIA12810	road kerb & formation Sec III A - roadwork and utilities section 3 carriageway -	7	12-Mar-18	19-Mar-18	0%								<u>.</u>										į				-
Roadwork &	black top Utilities - Section 6 (L1102 - L1411)																										
SIIIA13399	Sec III A - roadwork and utilities section 6 carriageway -	0	12-Jan-18 A	26-Jan-18 A	100%																						
SIIIA13444	gully pipe (L1101 -L1102) Sec III A - roadwork and utilities section 6 carriageway -	0	27-Jan-18 A	03-Feb-18 A	100%																						
	watermain (road crossing)	13																									
SIIIA13445	Sec III A - roadwork and utilities section 6 carriageway - utilities: crossed duct(HEC , HGC, PCCW)	13	05-Feb-18 A	06-Mar-18	0%			-																			

Page: 3 / 7

ity ID	LA officials Alarma	Domeining Dur	Early Chart		1 1-5-2-0/	
ity ID	Activity Name	Remaining Dur	Early Start	Early Finish	Activity % Complete	2018 2019 2019 2019
SIIIA13450	Sec III A - roadwork and utilities section 6 carriageway - road kerb & formation	18	07-Mar-18	27-Mar-18	0%	
SIIIA13470	Sec III A - roadwork and utilities section 6 carriageway - black top	7	28-Mar-18	09-Apr-18	0%	
SIIIA13570	Achievement of Section IIIA of the Works	0		08-Sep-18	0%	
Section V - Re	emaining At-Grade Road & Road P2					
Roadwork &	Utilities					
Section 1 (L1	504 - L1900)					
SV12456	Sec V-Roadwork & Utilities Section 1 - implementation of	0	20-Feb-18*	20-Feb-18	0%	
SV12460	TTA stage 5E (closure of slow lane at northbound of Expo Sec V - Roadwork & Utilities Section 1 - drinage works	15	20-Feb-18	08-Mar-18	0%	
SV12462	(L1902 - L1900) Sec V - Roadwork & Utilities Section 1 - gully pipe (L1902 -	6	09-Mar-18	15-Mar-18	0%	
SV12464	L1900) Sec V - Roadwork & Utilities Section 1 - temp. reinstatement	14	16-Mar-18	04-Apr-18	0%	
SV12466	to match with existing Expo Drive Sec V - Section 1 - Modification to 2nd stage ITA (V.O. 50) :	1	14-Jul-18	14-Jul-18	0%	
SV12468	closure of northbound and maintain one lane at southbound Sec V - Roadwork & Utilities Section 1 Carriageway -	7	16-Jul-18	23-Jul-18	0%	
SV12490	breaking existing asphalt Sec V - Roadwork & Utilities Section 1 Carriageway - Road	10	24-Jul-18	03-Aug-18	0%	
SV12520	kerb & formation Sec V - Roadwork & Utilities Section 1 Carriageway - Black	7	04-Aug-18	11-Aug-18	0%	
SV12522	Sec V - Section 1 - Implementation of TTA for road closure	3	13-Aug-18	15-Aug-18	0%	
SV12524	of northbound and southbound of Expo Drive Sec V - Section 1 - Northbound & Southbound of Expo Drive :	14	16-Aug-18	31-Aug-18	0%	
SV12526	breaking asphalt Sec V - Section 1 - Northbound & Southbound of Expo Drive:	14	01-Sep-18	17-Sep-18	0%	
SV12528	road kerb & formation Sec V - Section 1 - Northbound & Southbound of Expo Drive : black top	7	18-Sep-18	26-Sep-18	0%	
SV12570	Sec V - Roadwork & Utilities Section 1 footpath - utilities: TCSS	12	29-Dec-17 A	05-Mar-18	60%	
SV12580	Sec V - Roadwork & Utilities Section 1 footpath - paving block	29	06-Mar-18	12-Apr-18	0%	
Section 2 (L	1510 - L1504)					
SV12624	Sec V - Roadwork & Utilities Section 1 Carriageway - road kerb & formation	0	04-Jan-18 A	30-Jan-18 A	100%	
SV12626	Sec V - Roadwork & Utilities Section 1 Carriageway - black top	13	31-Jan-18 A	06-Mar-18	0%	
SV12692	Sec V - Roadwork & Utilities Section 2 footpath - U channel	11	17-Jan-18 A	03-Mar-18	21.43%	
SV12695	Sec V - Roadwork & Utilities Section 2 footpath - Watermain	13	05-Mar-18	19-Mar-18	0%	
SV12700	Sec V - Roadwork & Utilities Section 2 footpath - utilities: TCSS	16	20-Mar-18	11-Apr-18	0%	
SV12740	Sec V - Roadwork & Utilities Section 2 footpath - paving block	18	12-Apr-18	03-May-18	0%	
Section 3 (C	ulvert L - L1510)					
SIV12860	Sec V - Roadwork & Utilities Section 3 footpath - Utilities: TCSS, HGC, PCCW)	30	16-Jan-18 A	26-Mar-18	11.76%	
SIV12880	Sec V - Roadwork & Utilities Section 3 footpath - Paving block	21	27-Mar-18	24-Apr-18	0%	
Section 4 (Ki	L106 - Culvert L)					
SIV12282	Sec V - Roadwork & Utilities Section 4 Carriageway - Drainage Works (L1311 - Culvert L, L1201 - Culvert L)	10	20-Feb-18	02-Mar-18	0%	
SIV12300	Sec V - Roadwork & Utilities Section 4 Carriageway - Gully pipe (L1301 - Culvert L, L1201 - Culvert L)	7	03-Mar-18	10-Mar-18	0%	
SIV12302	Sec V - Roadwork & Utilities Section 4 Carriageway - watermain	6	12-Mar-18	17-Mar-18	0%	
SIV12305	Sec V - Roadwork & Utilities Section 4 Carriageway - utilities : cross road duct	7	19-Mar-18	26-Mar-18	0%	
SIV12310	Sec V - Roadwork & Utilities Section 4 Carriageway - Road kerb & formation : between culvert K and culvert L	15	27-Mar-18	17-Apr-18	0%	
SIV12320	Sec V - Roadwork & Utilities Section 4 Carriageway - Black top: between culvert K and culvert L	10	18-Apr-18	28-Apr-18	0%	
SIV12340	Sec V - Roadwork & Utilities Section 4 Carriageway - Black top : at west of culvert K	7	20-Feb-18	27-Feb-18	0%	
SIV12422	Sec V - Roadwork & Utilities Section 4 footpath - Utilities : TCSS	20	20-Feb-18	14-Mar-18	0%	
SIV12440	Sec V - Roadwork & Utilities Section 4 footpath - Utilities : HGC & PCCW	8	15-Mar-18	23-Mar-18	0%	


Page: 4 / 7

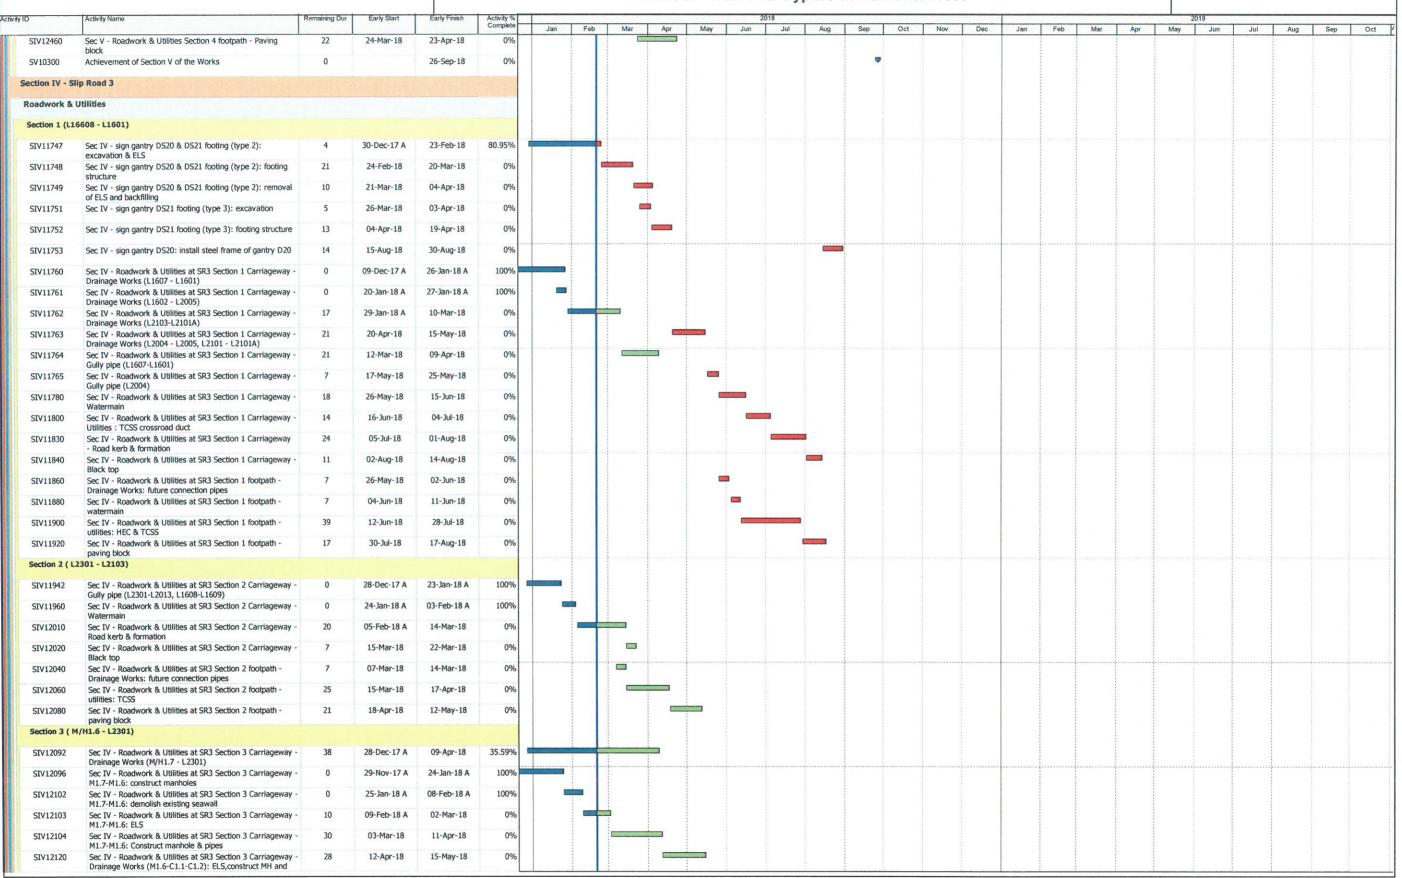

Page	:5/7	

vity ID	Activity Name	Remaining Dur	Early Start	Early Finish	Activity % Complete							2018		2001 200		100				1700			2019				
SIV12121	Sec IV - Roadwork & Utilities at SR3 Section 3 Carriageway -	6	16-May-18	23-May-18	O%	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct
SIV12122	Drainage Works (M1.6-C1.1-C1.2): Backfilling & shift lane Sec IV - Roadwork & Utilities at SR3 Section 3 Carriageway -	5	24-May-18	29-May-18	0%						1																
SIV12140	Drainage Works (M1.6-C1.1-C1.2): Construct MH C1.2 Sec IV - Roadwork & Utilities at SR3 Section 3 Carriageway -	32	10-Apr-18	17-May-18	0%																						
SIV12150	Gully pipe (M/H 1.7 - L2301) Sec IV - Roadwork & Utilities at SR3 Section 3 Carriageway -	14	18-May-18	04-Jun-18	0%																						
SIV12155	Road kerb Sec IV - Roadwork & Utilities at SR3 Section 3 Carriageway -	10	05-Jun-18	15-Jun-18	0%																						
SIV12160	formation Sec IV - Roadwork & Utilities at SR3 Section 3 Carriageway -	7	16-Jun-18	25-Jun-18	0%																						
SIV12170	Black top Sec IV - Roadwork & Utilities at SR3 Section 3 footpath -	21	10-May-18	04-Jun-18	0%																						
SIV12180	Utilities: TCSS Sec IV - Roadwork & Utilities at SR3 Section 3 footpath - U	10	05-Jun-18	15-Jun-18	0%						_																
SIV12220	channel Sec IV - Roadwork & Utilities at SR3 Section 3 footpath -																										
	Paving block	25	16-Jun-18	17-Jul-18	0%																						
SIV12222	Achievement of Section IV of the Works	0		30-Aug-18	0%								•														
	Remainder Works																							·			
	nage Works (Culvert L - M/H1.7, Adjacent to SR3)																										
SVII11600	Sec IV - Roadwork & Utilities at SR3 Section 4 Carriageway - Drainage Works (Culvert L -MH1.7)	48	08-Jan-18 A	20-Apr-18	18.64%	and the second second																					
SVII11620	Sec IV - Roadwork & Utilities at SR3 Section 4 Carriageway : traffic diversion at Lung King Street	3	21-Apr-18	24-Apr-18	0%																						
SVII11640	Sec IV - Roadwork & Utilities at SR3 Section 4 Carriageway - Gully pipe (Culvert L -MH1.7)	27	25-Apr-18	28-May-18	0%																						
SVII11650	Sec IV - Roadwork & Utilities at SR3 Section 4 Carriageway - TCSS duct	7	29-May-18	05-Jun-18	0%					I																	
SVII11654	Sec IV - Roadwork & Utilities at SR3 Section 4 Carriageway - road kerb & formation	14	06-Jun-18	22-Jun-18	0%																						
SVII11660	Sec IV - Roadwork & Utilities at SR3 Section 4 Carriageway - Black top	6	23-Jun-18	29-Jun-18	0%																						
SVII11680	Sec IV - Roadwork & Utilities at SR3 Section 4 footpath - U channel	14	29-May-18	13-Jun-18	0%																						
SVII11700	Sec IV - Roadwork & Utilities at SR3 Section 4 footpath - utilities: TCSS	14	14-Jun-18	30-Jun-18	0%																						
SVII11720	Sec TV - Roadwork & Utilities at SR3 Section 4 footpath - paying block	14	03-Jul-18	18-Jul-18	0%																						
Retaining Wa	III RW5 Construction				2018																						
SVII10660	Sec VII - Retaining Wall RW5 (bay 1) - construct base slab	22	20-Mar-18	18-Apr-18	0%																						
SVII10680	and wall Sec VII - Retaining wall RW5 (bay 2) - construct base slab	22	19-Apr-18	15-May-18	0%																						
SVII10800	and wall Sec VII - Retaining wall RW5 (bay 3) - construct base slab	22	20-Mar-18	18-Apr-18	0%																						
SVII10820	and wall Sec VII - Retaining wall RW5 (bay 4) - construct base slab	22	19-Apr-18	15-May-18	0%	-																					
SVII10860	and wall Sec VII - Retaining wall RW5 - curing, removal formwork	8	16-May-18	25-May-18	0%																						
Landing Step	s Construction																										
Landing Step	os BSW13																										
SVII10900	Sec VII - Landing steps (BSW13) - install vertical fender /	15	15-May-18	01-Jun-18	0%																						
SVII10920	step fender Sec VII - Landing steps (BSW13) - install s.s. handrail /	25	02-Jun-18	03-Jul-18	0%							1															
Landing Step	tactile / sign board / bollard				2,0																						
SVII10980	Sec VII - Landing steps (BSW4) - install vertical fender / step	15	20-Jun-18	07-Jul-18	0%							_															
SVII11000	fender Sec VII - Landing steps (BSW4) - install s.s. handrail / tactile	25	09-Jul-18										_														
Landing Step	/ sign board / bollard	25	07-Jul-18	06-Aug-18	0%								-														
			25.1.1.5			ļ		ļ																			
SVII11060	Sec VII - Landing steps (BSW5) - install vertical fender / step fender		25-Jul-18	10-Aug-18	0%																						
SVII11080	Sec VII - Landing steps (BSW5) - install s.s. handrail / tactile / sign board / bollard	25	11-Aug-18	08-Sep-18	0%									-													
Landing Step																											
SVII11140	Sec ${\rm VII}$ - Landing steps (BSW9) - install vertical fender / step fender	15	13-Jun-18	30-Jun-18	0%																						
SVII11160	Sec VII - Landing steps (BSW9) - install s.s. handrail / tactile / sign board / bollard	25	03-Jul-18	31-Jul-18	0%																						

Page		6	1	7	
------	--	---	---	---	--

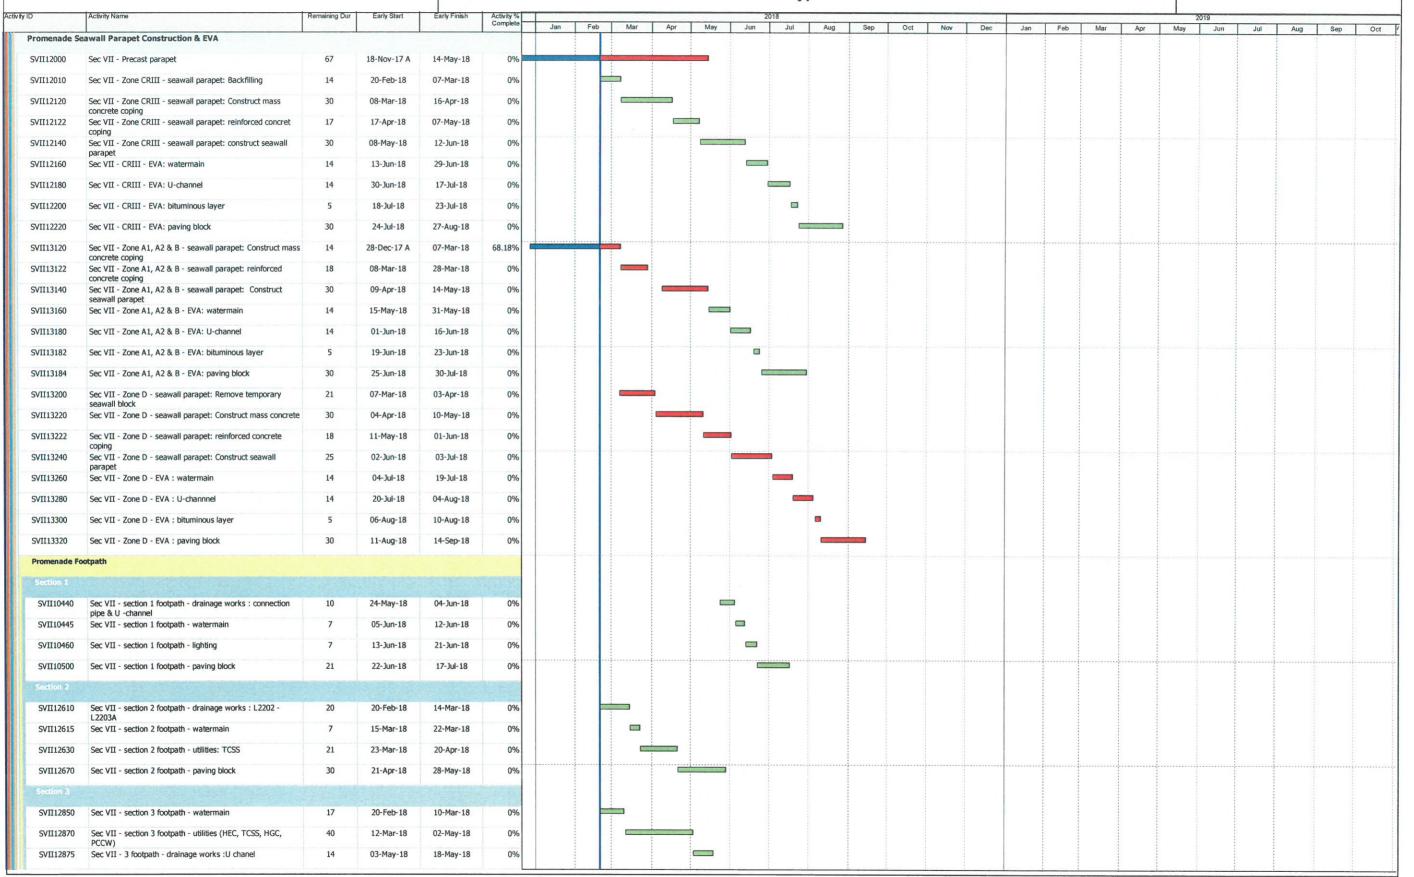

Page: 7/7

