

香港軒尼詩道一三九號中國海外大厦二十九樓 29/F, China Overseas Building, 139 Hennessy Road, Hong Kong. 電話Tel: (852)2823 7888 傳真Fax: (852)2527 6782

網址: http://www.csci.com.hk

Our ref:

CDD/2002/L/ENV/ALL/002554

Date:

24 March 2014

By Hand

#### **Environmental Protect ion Department**

Environmental Impact Assessment Office 27/F., Southorn 130 Hennessy Road, Wan Chai, Hong Kong

Attn.: Mr. Billy Ma

Contract No. HY/2010/08 Central - Wan Chai Bypass - Tunnel (Slip Road 8 Section) Submission of Noise Management Plan (Revision 02) under condition 2.23 of FEP-07/356/2009

Further to the letter with ref. (7) in EP2/H4/S3/ 15 Pt. 27 dated 17 December 2013, we are pleased to submit the Noise Management Plan (Revision 02) for your information and approval.

Enclosed please find the following documents for your kind perusal

- Certification letter of ET Leader,
- ii) Verification letter of IEC and
- Noise Management Plan (Rev 02) with 4 hard copies & 1 electronic copy (both iii) pdf & html format respectively)

Thank you for your kind attention and please do not hesitate to contact our Environmental Officer -Mr. Chi Ming, WONG at 9717 7986 should you have any further queries.

Yours faithfully,

For and on behalf of

China State Construction Engineering (Hong Kong) Ltd.

Dr. Dave Chan

Site Agent

Encl.

c.c. PRE/CWB

- Attn: Mr. Peter Poon

ET/ Lam

- Attn: Mr. Raymond Dai (cover only) Fax: 2882 3331

IEC/ Environ

- Attn: Mr. David Yeung (cover only) Fax: 3548 6988

DC/CMW/ysk



Ref.: AACWBIECEM00 0 5020L.14

18 March 2014

China State Construction Engineering (Hong Kong) Ltd P.O. Box 35159 King's Road Post Office

By Post

Attention: Dr. Dave Chan

Dear Sir,

Re: FEP-07/356/2009

Contract No. HY/2010/08

Central - Wan Chai Bypass Tunnel (Slip Road 8 Section)

Noise Management Plan (Revision 2)

Reference is made to your submission of the Noise Management Plan to us through E-mail on 11 March 2014 for our review and comment.

Please be informed that we have no adverse comment on the captioned submission. We write to verify the captioned submission in accordance with Condition 2.23 of FEP-07/356/2009.

Please feel free to contact the undersigned should you have any queries.

Yours sincerely,

David Yeung

Independent Environmental Checker

C.C.

HyD

Mr. Jones Lai

by fax: 2714 5289

CEDD

Mr. Robert Tsoi

by fax: 2577 5040

AECOM

Mr. Dennis Norton (CRE)

by fax: 3912 3010

**AECOM** 

Mr. Conrad Ng

by fax: 2691 2649

LAM

by fax: 2882 3331 Mr. Raymond Dai (ETL)

Q:\Projects\AACWBIECEM00\Corr\AACWBIECEM00\_0\_5020L.14.doc

Ref

G1120/CS/L665/FEP-07/356/2009

Date

: 14 March 2014

China State Construction Engineering (Hong Kong) Ltd 29/F, China Overseas Building, 129 Hennessy Road Hong Kong

Attn: Site Agent, Dr. Dave Chan

Dear Dr. Chan,

Contract No. HY/2010/08 Central - WanChai Bypass Tunnel (Slip Road 8 Section)

Noise Management Plan (Rev. 2)

Referring to the captioned submission dated 11 March 2014 received through email on 11 March 2014, we have reviewed your submitted details and hereby certified this submission in accordance with Condition 2.23 of FEP-07/356/2009.

Should you have any enquiry, please feel free to contact the undersigned at 2839 5666.

Yours faithfully,

Raymond Dai

Environmental Team Leader

C.C.

HyD CEDD - Mr. Jones Lai - Mr. Robert Tsoi (By Fax: 2714 5289) (By Fax: 2577 5040)

AECOM

- Mr. Frankie Fan

(By Fax: 2587 1877)

ENVIRON

- Mr. David Yeung

(By Fax: 3548 6988)

11/F, Centre Point, 181-185 Gloucester Road, Wanchal, Hong Kong Tel: (852) 2882-3939 Website: www.lamgeo.com

Fax: (852) 2882-3331 Email: info@lamgeo.com









## Central – Wan Chai Bypass Tunnel (Slip Road Section 8) Contract No. HY/2010/08

Noise Management Plan under condition 2.23 of FEP- 07/356/2009

Revision: 2

March 2014

Prepared by:	C. M Wong	Date: 11 March 2014
Environmental Officer		

This document contains confidential information of China State Construction Engineering (Hong Kong) Limited and shall not be copied or amended without the approval of the Contractor's Representative



## **Table of Content**

1.0 Introduction	1
2.0 Scope of works & Environmental Legislation,	1
Policies, Plans, Standards and Criteria	
3.0 Noise Limit	3
4.0 IDENTIFIED NOISE SENSITIVE RECEIVERS (NSRS)	4
5.0 Construction Noise	4
6.0 MITIGATION OF ENVIRONMENTAL IMPACTS	5

## List of Appendices

## Appendix A

Location Plan for Noise Sensitive Receivers

## Appendix B

Construction Schedule

## Appendix C

Portions of Site

## Appendix D

Acoustic Screen and Sound Insulation Materials Mounting



#### 1.0 Introduction

Under Condition 2.23 of Further Environmental Permit No FEP-07/356/2009, a noise management plan should be prepared and submitted to EPD two weeks before the commencement of the corresponding parts of the Project. In accordance to the Environmental Impact Assessment (EIA) Report and Section 3 of the relevant EM&A Manual, the noise mitigation measures are proposed to alleviate the noise impact due to the project. This noise management plan provides details regarding the works to be conducted at Slip Road 8 Section (marine based).

Noise Management Plan for land based, please refers to separate submission under FEP-10/364/2009/B.

## 2.0 SCOPE OF WORKS & ENVIRONMENTAL LEGISLATION, POLICIES, PLANS, STANDARDS AND CRITERIA

In accordance with the conditions stipulated in the Environmental Permit No. EP-356/2009 and Further Environmental Permit No. FEP-07/356/2009, silt curtain shall be deployed around seawall dredging and seawall trench filling in reclamation shoreline zone - TCBR.

The scope of works mainly includes:

- Temporary reclamation works of around 3 ha in size including associated dredging works at CBTS; and
- ii) Removal of the temporary reclamation after the construction of the Trunk Road; and reinstatement of CBTS.

Noise impacts have been assessed in accordance with the criteria and methodology given in the Technical Memoranda (TM) made under the Noise Control Ordinance (NCO) and the Technical Memorandum on Environmental impact Assessment Process (EIAO-TM).

The NCO provides the statutory framework for noise control. Assessment procedures and standards are set out in the following Technical Memoranda:-

- 1. Technical Memorandum on Environmental impact Assessment Process (EIAO-TM);
- 2. Technical Memorandum on Noise from Construction Work other than Percussive Piling (GW-TM);



- 3. Technical Memorandum on Noise from Construction Work in Designated Areas (DA-TM); and
- 4. Technical Memorandum on Noise from Places other than Domestic Premises, Public Places or construction Sites (IND-TM).



#### 3.0 Noise Limit

The NCO provides the statutory framework for noise control of construction work other than percussive piling using powered mechanical equipment (PME) between the hours of 1900 to 0700 or at any time on Sundays and a general holiday (that is, restricted hours). Noise control on construction activities taking place at other times is subject to the Criteria for Evaluating Noise Impact stated in Table 1B of Annex 5 in the EIAO-TM. The noise limit is 75dB(A) Leq(30 minutes) at the facades of dwellings and 70dB(A) Leq(30 minutes) at the facades of schools (65dB(A) during examinations). The construction noise criteria are summarized in Table 1.

Table 1 Daytime Construction Noise Criteria Uses Noise Level in Leq (30-minutes), dB(A)

Uses	Noise Level in Leq (30-minutes), dB(A)
Domestic Premises	75
Educational Institution	70
Educational Institution (during examination)	65

Between 1900 and 0700 hours and all day on Sundays and public holidays, activities involving the use of powered mechanical equipment (PME) for use purpose of carrying out construction work is prohibited unless a Construction Noise Permit (CNP) has been obtained.

A CNP may be granted provided that the Acceptable Noise Level (ANL) for the noise sensitive receivers (NSRs) can be complied with. ANLs are assigned depending upon the Area Sensitivity Ratings (ASRs). The corresponding basic noise levels (BNLs) for evening and night time periods are given in Table 2.

Table 2 Construction Noise Criteria for Activity other than Percussive Piling

Time Period	Basic	noise Level (B	SNLs)
	ASR A	ASR B	ASR C
Evening (1900 to 2300 hours)	60	65	70
Night (2300 to 0700 hours)	45	50	55



#### 4.0 Identified Noise Sensitive Receivers (NSRs)

In order to evaluate the construction noise impacts from the project, representative noise sensitive receivers (NSRs) for this contract which are identified in the EIA report (Register No. AEIAR-125/2008) were selected for assessment and summarized in Table 3. The distances in below table refer to Appendix 4.1 of AEIAR-125/2008 and Appendix 4.1 of AEIAR-041-2001.

Table 3 Noise Sensitive Receivers nearby

Location	Name of building	Catalogue	Nearest Distance (m)
			from the construction
			site
Causeway Bay	Riviera Mansion	Residential	98
Causeway Bay	Marco Polo Mansion	Residential	102
Causeway Bay	Viking Garden	Residential	459
Tin Hau	Victoria Court	Residential	405
Tin Hau	Mayson Garden	Residential	375
Tin Hau	Gordon House	Residential	361
Tin Hau	Belle House	Residential	327

#### 5.0 Construction Noise

#### 5.1 Construction Tasks

Below construction tasks will likely lead to emission of construction noise:

- Temporary reclamation works of around 3 ha in size including associated dredging works at CBTS;
- Removal of the temporary reclamation after the construction of the Trunk Road; and reinstatement of CBTS;

#### 5.2 Uses of Powered Mechanical Equipment (PME)

Type and number of powered mechanical equipment which would be used on site are referred to Appendix 4.13 of AEIAR-125/2008 and grouped according to different stage of works. Detailed list of PME and specific noise impact of individual construction task will be reviewed in relevant method statement(s) via submission to Engineer.



### 6.0 Mitigation of Environmental Impacts

In order of further reduce the noise impacts to NSRs during normal daytime working hours, it is still recommended that the following noise reduction measures shall be considered as far as practicable during construction.

### 6.1 Quality Powered Mechanical Equipment (QPME)

Uses of the following types of QPME will be considered during the construction phase of this project to reduce noise impacts:

- Bulldozer, wheeled/tracked
- Excavator, wheel/tracked
- Loader, wheeled/tracked
- Asphalt paver
- Road roller
- Roller, vibratory
- Power rammer (petro)
- Compactor, vibratory
- Crane, mobile
- Generator



#### 6.2 Construction Details and Mounting Details of the Acoustic Screen

Acoustic screen will be deployed if required to shield the noise sensitive receivers from the sources of noisy activities. The acoustic screen and sound insulation materials mounting for percussion breakers of excavators are shown in Appendix D.

#### **6.3 Other Mitigation Measures**


The following good practices will be adopted when practical to alleviate noise impacts:

- All PMEs to be used on site should be properly maintained;
- Mobile plants should be sited as far as away from NSRs as possible;
- Plants shall be avoided to start up all engines simultaneously;
- Install direct noise mitigation measures including movable acoustics enclosure where necessary; and
- PMEs known to emit noise strongly in one direction should, where possible, be orientated so that the noise is directed away from the nearby NSRs



# Appendix A

Location Plan for Noise Sensitive Receivers

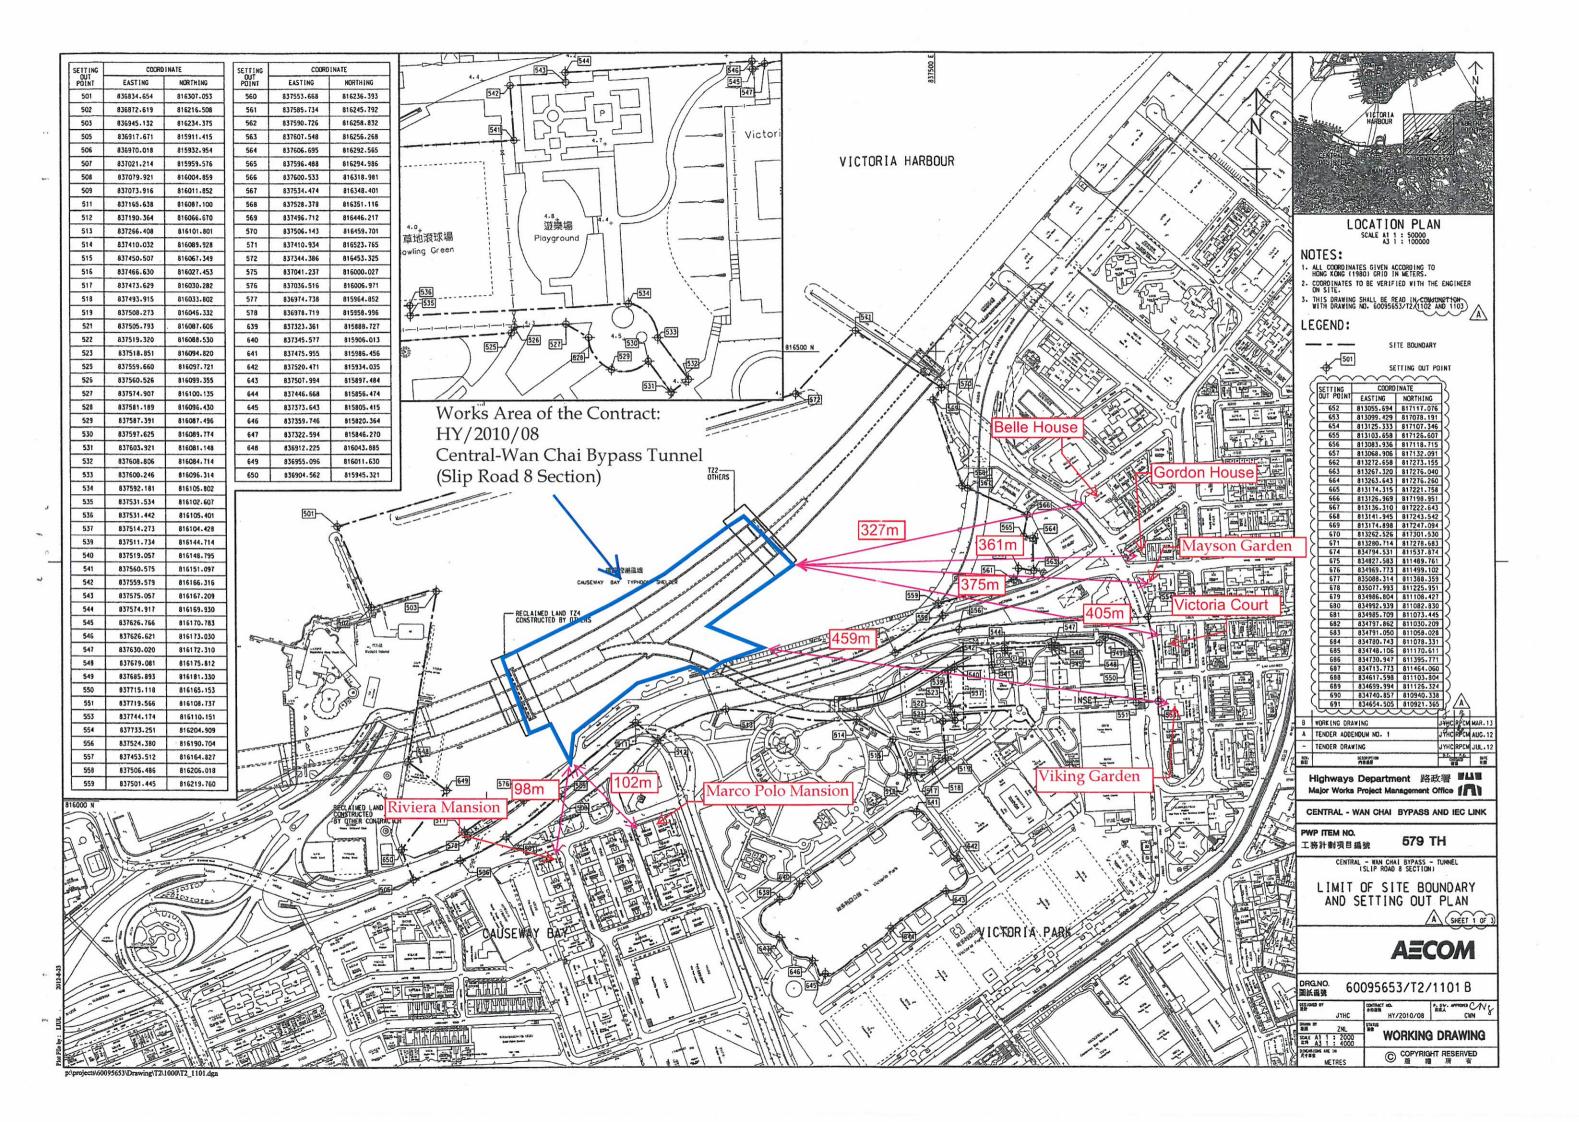



# Appendix B

Construction Schedule

TCBR4 Marine Works Programme	HY/2010/08 Central -Wan Chai Bypass Tunnel (Slip Road 8 Section)
------------------------------	--

	Removal of Reclamation Area	lamatic	of Recl	oval c	Rem	-							17/1/2017	25/8/2015	512 days	3 Removal of Reclamation Area	ω	
						Ŋ	j Work	Filling	ion &	Seawall Construction & Filling Works	awall Co	Sea	15/1/2015	9/5/2014	252 days	2 Seawall Construction & Filling Works	2	
										Dredging Works	redgin	0	17/10/2014	15/11/2013	337 days	Dredging Works	Н	
Q1	2 Q4	72 Q3	1 0	Q.	w Q	Q	1 Q2	0	Ó	Q4 Q1 Q2 Q3 Q4 Q1 Q2 Q3 Q4 Q1 Q2 Q3 Q4 Q1	Q1	2						
2017年			6年	2016年			5年	2015年			2014年	2	Finish	Start	Duration	Task Name		-
ē					0.1,	Š	(	2	ט ק		rogra	s P	ine Work	TCBR4 Marine Works Programme	To			


Page 1

Update: 28/10/2013



# Appendix C

Portions of Site

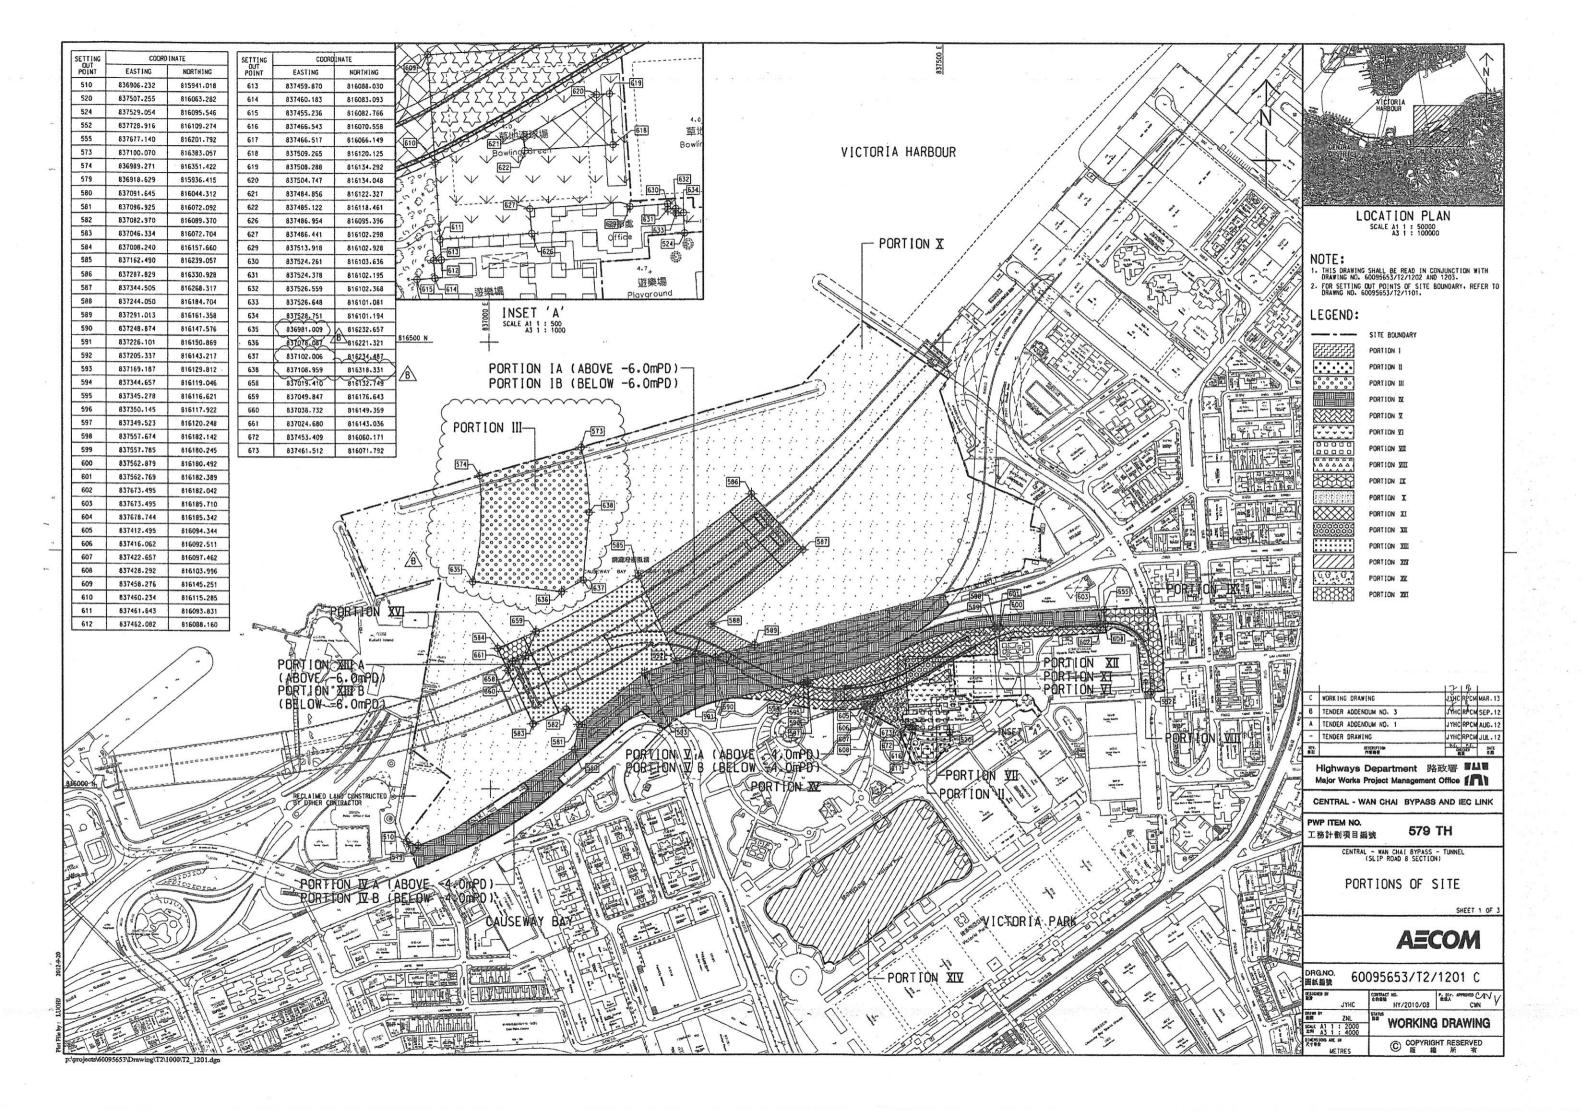



## Appendix D

Acoustic Screen and Sound Insulation
Materials Mounting



Photo 1 - Noise Barrier

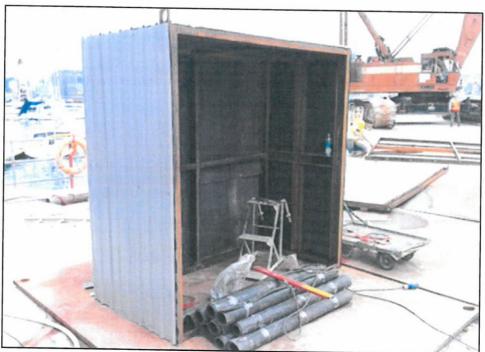


Photo 2 - Partial Enclosure